






3596BTRM  
Tub/Shower System  
**Specification Submittal**

Location:

Mode Numbers	Modifications
<input type="checkbox"/> <b>3596BTRM</b> Tub/Shower System Trim  <b>Valve Options</b> -261 series Temptrol shower valve with TRM modifier -161 series Temptrol shower valve requires TC modifiers -3DIVBODYSRT	<input type="checkbox"/> <b>15</b>  1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> <b>175</b> 1.75 (6.6 L/min) flow rate restrictor <input type="checkbox"/> <b>Delete suffix B</b> Chrome plastic escutcheon on valve with color graphics/indicators in place of standard brass escutcheon <input type="checkbox"/> <b>TC</b> Test Cap Trim (includes TA-10&T-12A) <i>used with 161 series Temptrol Valve.</i> <input type="checkbox"/> <b>L1</b> Less showerhead <input type="checkbox"/> <b>L2</b> Less hand shower (wand only) <input type="checkbox"/> <b>L3</b> Less showerhead and hand shower (head and wand only) <input type="checkbox"/> <b>L4</b> Less shower arm and flange <input type="checkbox"/> <b>L5</b> Less Hand shower system (less bar/cradle, hose, wand, and elbow. <input type="checkbox"/> <b>L7</b> Less handle <input type="checkbox"/> <b>BBZ</b> Brushed Bronze finish <input type="checkbox"/> <b>STN</b> Satin Nickel finish <input type="checkbox"/> <b>MB</b> Matte Black finish <input type="checkbox"/> <b>1L</b> 1" Spindle Extension
<b>Feature Highlights</b> <ul style="list-style-type: none"> <li>• Dia Hand Shower Trim.</li> <li>• Requires Temprol pressure balancing shower valve.</li> <li>• Adjustable stop screw to limit handle rotation.</li> <li>• 30" Slide bar.</li> <li>• Three function diverter body sold separately.</li> <li>• Slip-on tub spout.</li> <li>• 60" flexible metal hose.</li> <li>• 7 Mode hand shower with NPSO.</li> <li>• 7 Mode showerhead with NPSO.</li> <li>• Standard 2.0 gpm (7.6 L/min) flow restrictor.</li> <li>• Components made from metal and nonmetal materials plated in standard polished chrome finish.</li> </ul>	<b>Compliance</b> <ul style="list-style-type: none"> <li>• ASME A112.18.1/CSA B125.1</li> <li>• WaterSense 1.5 gpm (5.7 L/min) 1.75 gpm(6.6 L/min) 2.0 gpm (7.6 L/min)</li> <li>• Lever handle meets ADA requirements for operation</li> </ul>   
<b>Warranty</b>  <b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations. <b>10 Years</b> - for commercial/industrial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.	

**SKU Builder**


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	1L	Final SKU
3596	STN		15	TRM			3596STN15TRM
3596B	MB	L3		TRM	TC	1L	3596BMBL3TRMTC1L

**Note:** No more than two modifiers (L1-L7) and modifier order will follow numerical order.

**Architectural/Engineering Specification**

Symmons Dia Tub and Shower and Hand Shower System \_\_\_\_\_ Includes Dia shower trim powered by the Temptrol® Pressure Balancing valve. Features adjustable stop screw to limit handle rotation, 30" slide bar, slip on tub spout, 60" flexible metal hose, 7 mode hand shower, 7 mode showerhead and standard 2.0 gpm (7.6 L/min) flow restrictor. Components made from metal and non-metallic materials plated in standard polished chrome finish. 10 Year Commercial Warranty. Lever handle meets ADA requirements for operation. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 1.75 gpm (6.6 L/min), and 2.0 gpm (7.6 L/min) compliant. Available options: "15 - 1.5 gpm (5.7 L/min) flow restrictor", "175- 1.75 gpm(6.6 L/min) flow rate restrictor. "Delete Suffix B - Chrome plastic escutcheon", "L1 - Less showerhead", "L2 - Less hand shower (wand only)", "L3 - Less showerhead and hand shower (head and wand only)", "L4 - Less shower arm and flange", "L5 - Less hand shower system", "L7 - Less handle", "BBZ - Brushed Bronze finish", "MB - Matte Black finish", "STN - Satin Nickel finish", "1L - 1 inch Spindle Extension", and "TC - Test Cap Trim".

## Dimensions

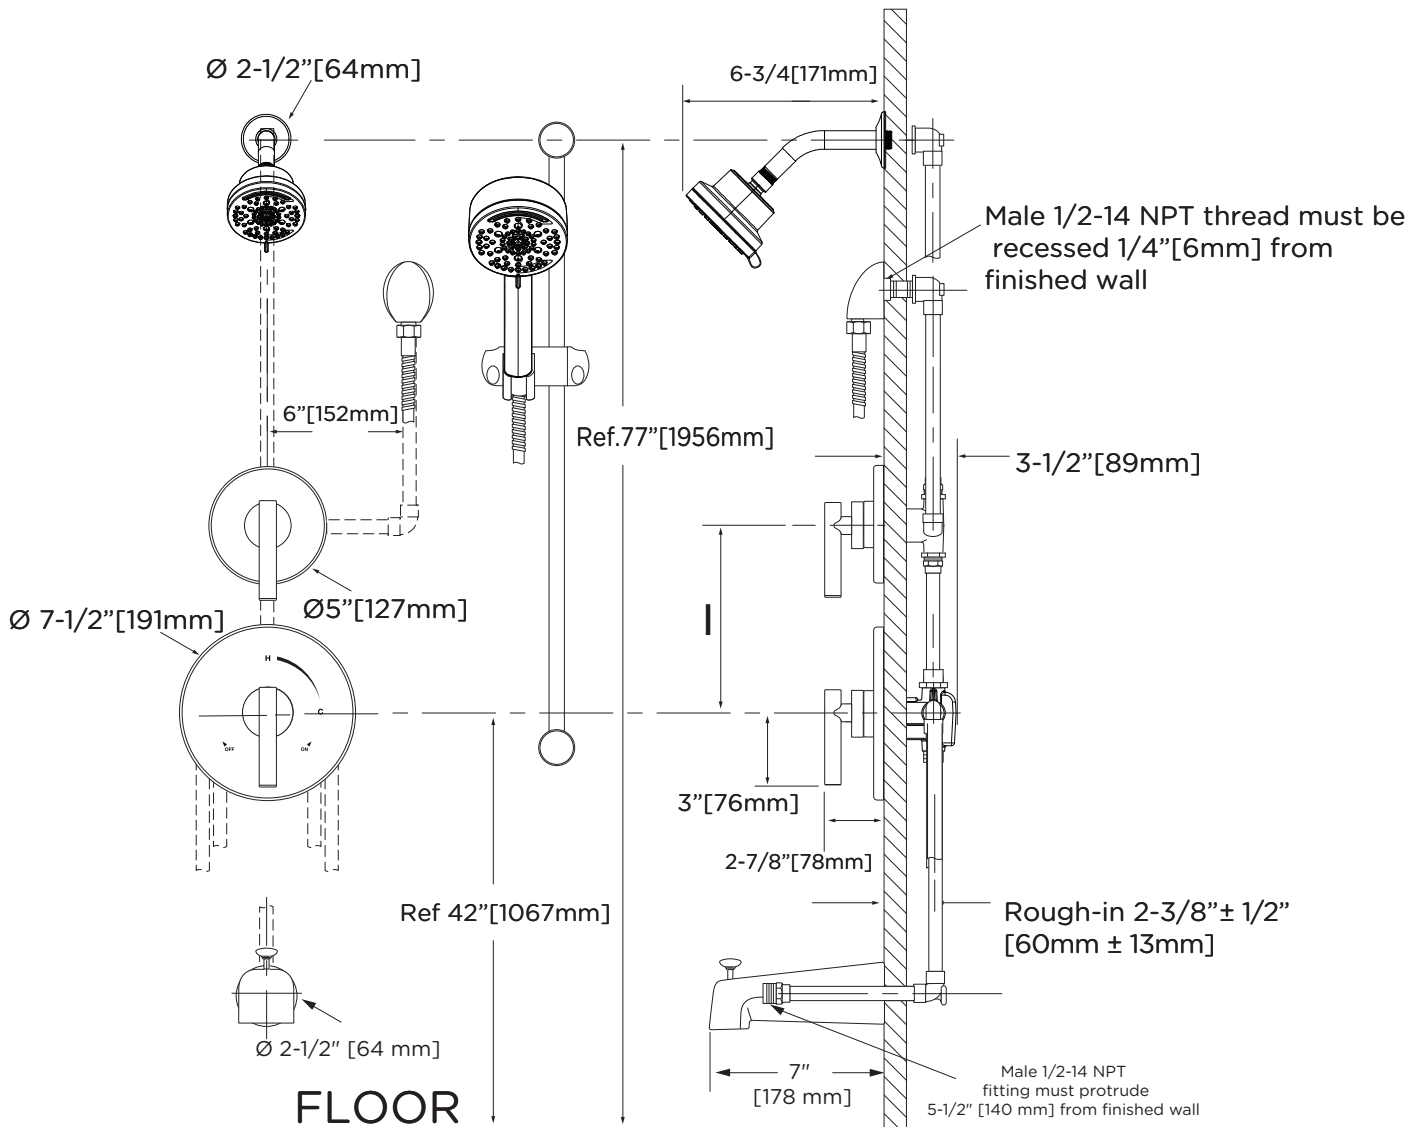

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) from dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions are subject to change without notice.