



6791TRM **Shower Trim**

Specification Submittal

ASME A112.18.1/CSA B125.1

Handle Lever meets ADA

requirements for operations.

2.0 gpm (7.6 L/min)

WaterSense 1.5 gpm (5.7 L/min)





Model Numbers	Options/Modifications		
□ 6791TRM Shower Trim Valve Options: -261 Series Temptrol Shower Valve with TRM modifier -161 Series Temptrol Shower Valve requires TC modifier	□ 15		
Feature Highlights	□ STN Satin Nickel finish □ MB Matte Black finish		
 Identity Shower Trim. Requires Temptrol Pressure Balancing Shower Valve. Metal lever handle. Single mode showerhead. Standard 2.0 gpm (7.6 L/min) flow restrictor. 	□ BBZ Brushed Bronze finish		
 Components shall be metal and nonmetal construction, plated in standard polished chrome finish. 	Warranty		
Compliance	Limited Lifetime - to the original end		

purchaser in consumer/residential

10 Years - for commercial/industrial

www.symmons.com/warranty for

complete warranty information.

installations.

installations. Refer to

SKU Builder


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
6791	МВ	L1		TRM	TC	6791MBL1TRMTC
6791	BBZ			TRM		6791BBZTRM

Note: No more than two modifiers (L1-L7) and modifier order will follow numerical order.

Architectural/Engineering Specification

includes Identity Shower Trim powered by Temptol Pressure Balancing Valve. Fea-Symmons Identity Shower Trim tures metal lever handle, single mode with NPSO showerhead, and standard 2.0 gpm (7.6 L/min) flow restrictor. Components shall be metal and nonmetallic construction, plated in standard polished chrome finish. 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min) complaint. Handle lever meets requirements for ADA operation. Available options include: "15 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L7 - Less handle", "TC - Test Cap Trim", "STN - Satin nickel finish", "MB - Matte Black finish", and "BBZ - Brushed Bronze finish".

Dimensions

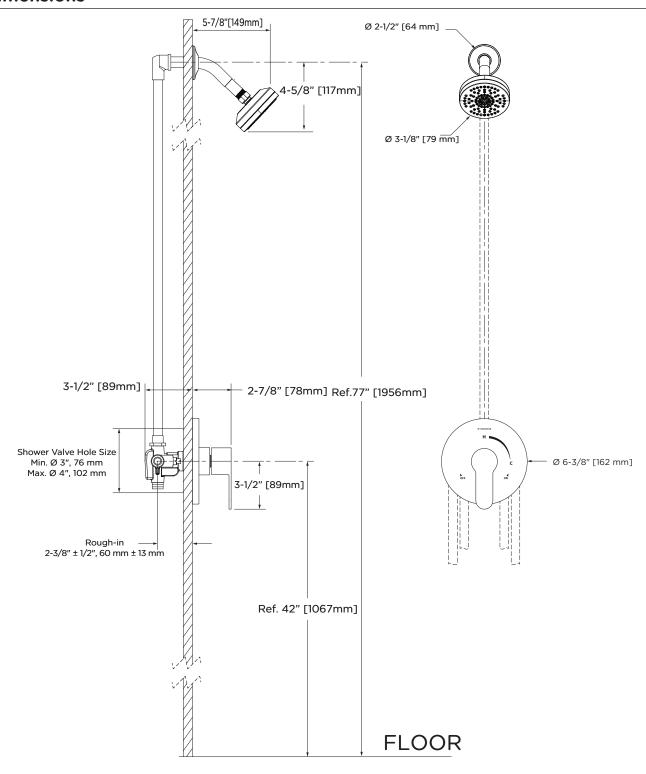

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.