

6796TRM  
Tub/Shower/Hand Shower Trim  
**Specification Submittal**

Location:

**Model Numbers** **Options/Modifications**

<p><input type="checkbox"/> <b>6796TRM</b> Tub/Shower/Hand Shower Trim</p> <p><b>Valve Options:</b> -261 Series Temtrol Shower Valve with TMR modifier -161 Series Temtrol Shower Valve requires TC modifiers -3DIVBODYSRT diverter body, 4 port</p>	<p><input type="checkbox"/> <b>15</b>  1.5 gpm (5.7 L/min) flow restrictor</p> <p><input type="checkbox"/> <b>L1</b> Less showerhead</p> <p><input type="checkbox"/> <b>L2</b> Less hand shower wand</p> <p><input type="checkbox"/> <b>L3</b> Less showerhead &amp; hand shower (head and wand only)</p> <p><input type="checkbox"/> <b>L4</b> Less head, arm and flange</p> <p><input type="checkbox"/> <b>L5</b> Less hand shower system (less cradle, hose, wand &amp; elbow)</p> <p><input type="checkbox"/> <b>L7</b> Less handle</p> <p><input type="checkbox"/> <b>TC</b> Test Cap Trim (includes TA-10&amp;T-12A) <i>used with 161 series Temtrol Shower Valve</i></p> <p><input type="checkbox"/> <b>STN</b> Satin Nickel finish</p> <p><input type="checkbox"/> <b>MB</b> Matte Black finish</p> <p><input type="checkbox"/> <b>BBZ</b> Brushed Bronze finish</p>
--	--

**Feature Highlights**

- Tub/Shower/Hand Shower Trim.
- Requires Temptrol® Pressure Balancing Valve.
- Metal lever handle.
- Cradle for hand shower wand.
- Dual checks for backflow protection.
- 60" flexible metal hose.
- 5-1/2" tub spout.
- Single mode hand shower wand with NPSO.
- Single mode showerhead.
- Standard 2.0 gpm (7.6 L/min) flow restrictors.
- Components shall be metal and nonmetal construction, plated in standard polished chrome finish.

**Compliance**

- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min)  
2.0 gpm (7.6 L/min)
- Lever handle meets ADA requirements for operation.



**Warranty**

**Limited Lifetime** - to the original end purchaser in consumer/residential installations.  
**10 Years** - for commercial/industrial installations. Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.



**SKU Builder**


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
6796	MB	L1		TRM	TC	6796MBL1TRMTC
6796	BBZ	L7	15	TRM		6796BBZL715TRM

**Note:** No more than two modifiers (L1-L7) and modifier order will follow numerical order.

**Architectural/ Engineering Specification**

Symmons Identity Tub and Shower and Hand Shower Trim \_\_\_\_\_ Includes Identity Tub and Shower and Hand Shower Trim powered by Temptrol® Pressure Balancing Shower Valve. Features metal level handle, cradle for hand shower wand, dual checks for backflow protection, 60" flexible metal hose, 5-1/2" tub spout, single mode hand shower wand with NPSO, single mode showerhead, and standard 2.0 gpm (7.6 L/min) flow restrictors. Components shall be metal and nonmetallic construction, plated in standard polished chrome finish. 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm and 2.0 gpm compliant. Lever handle meets ADA requirements for operation. Available options include: "15 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L2 - Less hand shower wand", "L3 - Less showerhead & hand shower wand", "L4 - Less showerhead, shower arm & flange", "L7 - Less handle", "TC - Test Cap Trim", "STN - Satin Nickel finish", "MB - Matte Black finish", and "BBZ - Brushed Bronze finish".

# Dimensions

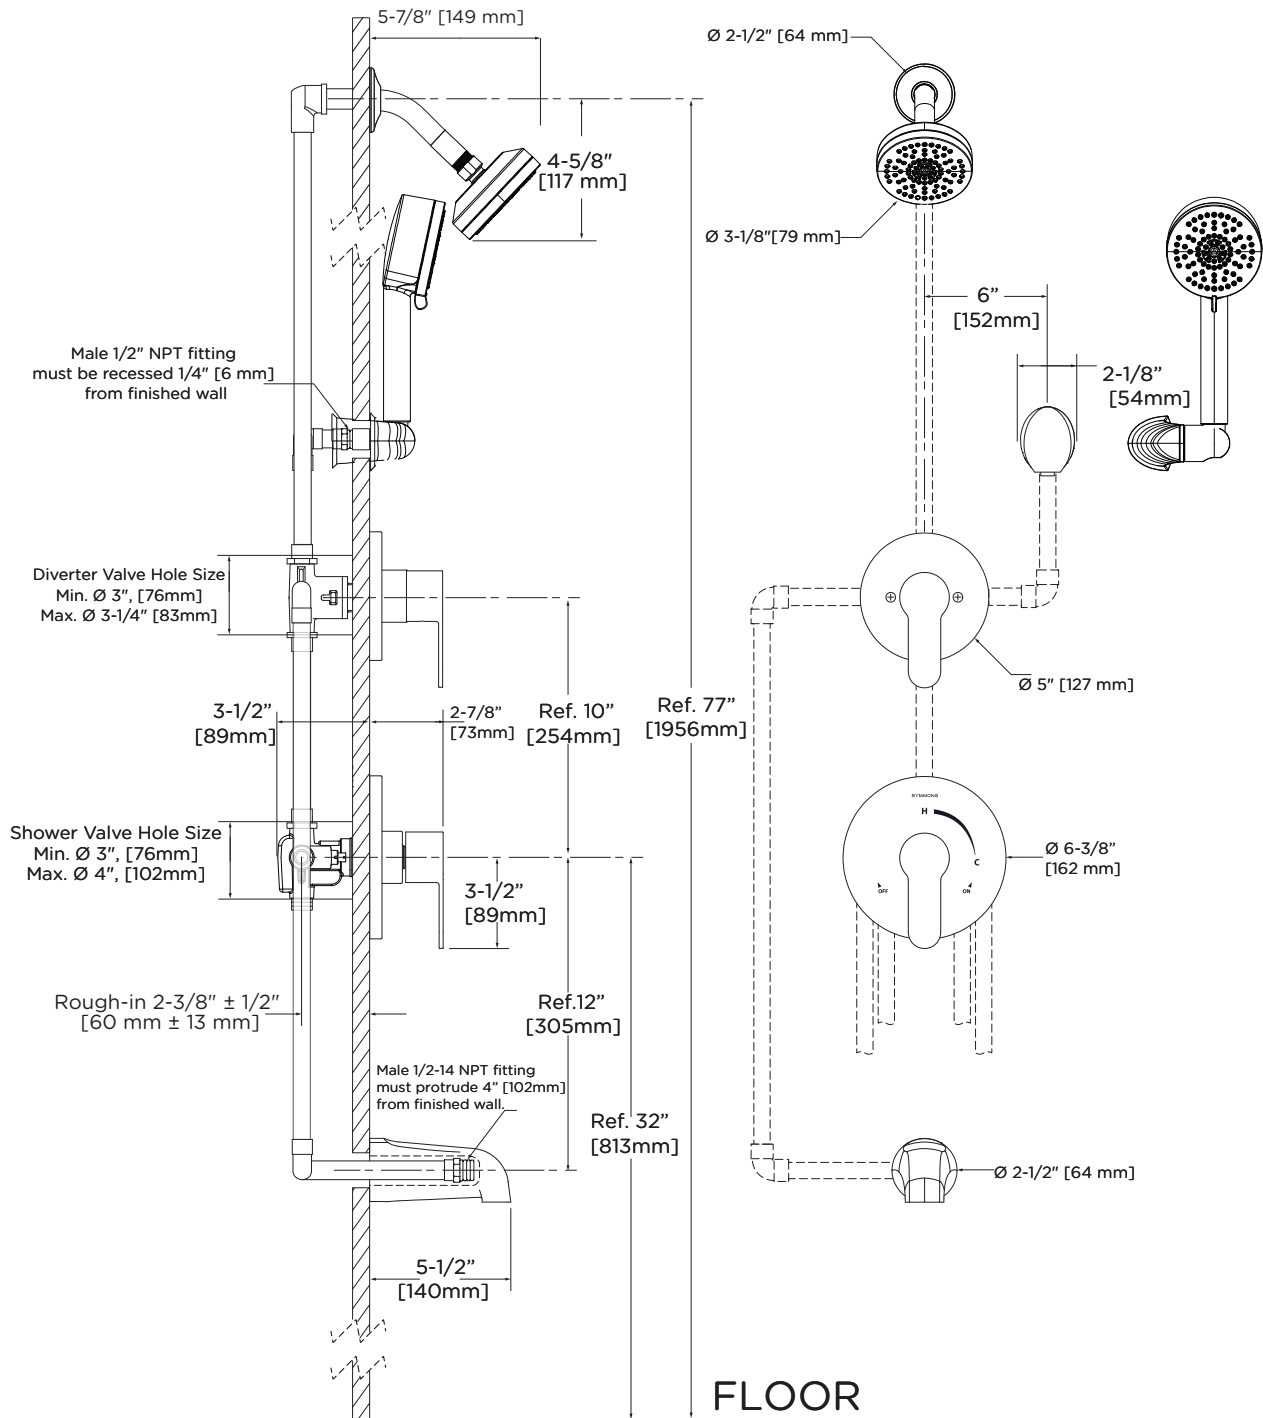

## Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.