




S6790TRM
Shower Valve Trim
Specification Submittal

Location:

<p>Model Numbers</p> <p><input type="checkbox"/> S6790TRM Shower Valve Trim</p> <p>Valve Options: -S262 or S261 Series Temptrol Shower Valve with TRM modifier -S162 or S261 Series Temptrol Shower Valve requires TC modifier</p>	<p>Options/Modifications</p> <p><input type="checkbox"/> REB Rebuild trim kit, includes TA-10 and TA-4</p> <p><input type="checkbox"/> VP Vandal resistant escutcheon screws in place of standard screws</p> <p><input type="checkbox"/> TC Test Cap Trim (includes TA-10&T-12A) <i>used with S161/S162 series Temptrol Shower Valve</i></p> <p><input type="checkbox"/> STN Satin Nickel finish</p> <p><input type="checkbox"/> MB Matte Black finish</p> <p><input type="checkbox"/> BBZ Brushed Bronze finish</p>
<p>Feature Highlights</p> <ul style="list-style-type: none"> Identity Shower Valve Trim. Requires Temptrol® Pressure Balancing Shower Valve. Integral diverter control. Metal lever handle. Components shall be metal and nonmetal construction, plated in standard polished chrome finish. 	<p>Warranty</p> <p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 
<p>Compliance</p> <ul style="list-style-type: none"> ASME A112.18.1/CSA B125.1 Lever Handle meets ADA requirements for operation.  	

SKU Builder


Series	Finish	Modifier	TRM (required)	TC	Final SKU
6790	STN		TRM		6790STNTRM
6790	MB	VP	TRM	TC	6790MBVPTRMTC

Note: No more than two modifiers (L1-L7) and modifier order will follow numerical order.

Architectural/ Engineering Specification

Symmons Identity Valve Trim _____ Includes Shower Valve Trim powered by Temptrol® Pressure Balancing Shower Valve. Features metal lever handle and integral diverter control. Components shall be metal and nonmetallic construction, and plated in standard polished chrome finish. 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1 complaint. Lever handle meets ADA requirements for operation. Available options include: "REB - Rebuild trim kit", "VP - Vandal resistant escutcheon screws in place of standard screws", "STN - Satin Nickel finish", "MB - Matte Black finish", "BBZ - Brushed Bronze finish", and "TC - Test Cap Trim".

Dimensions

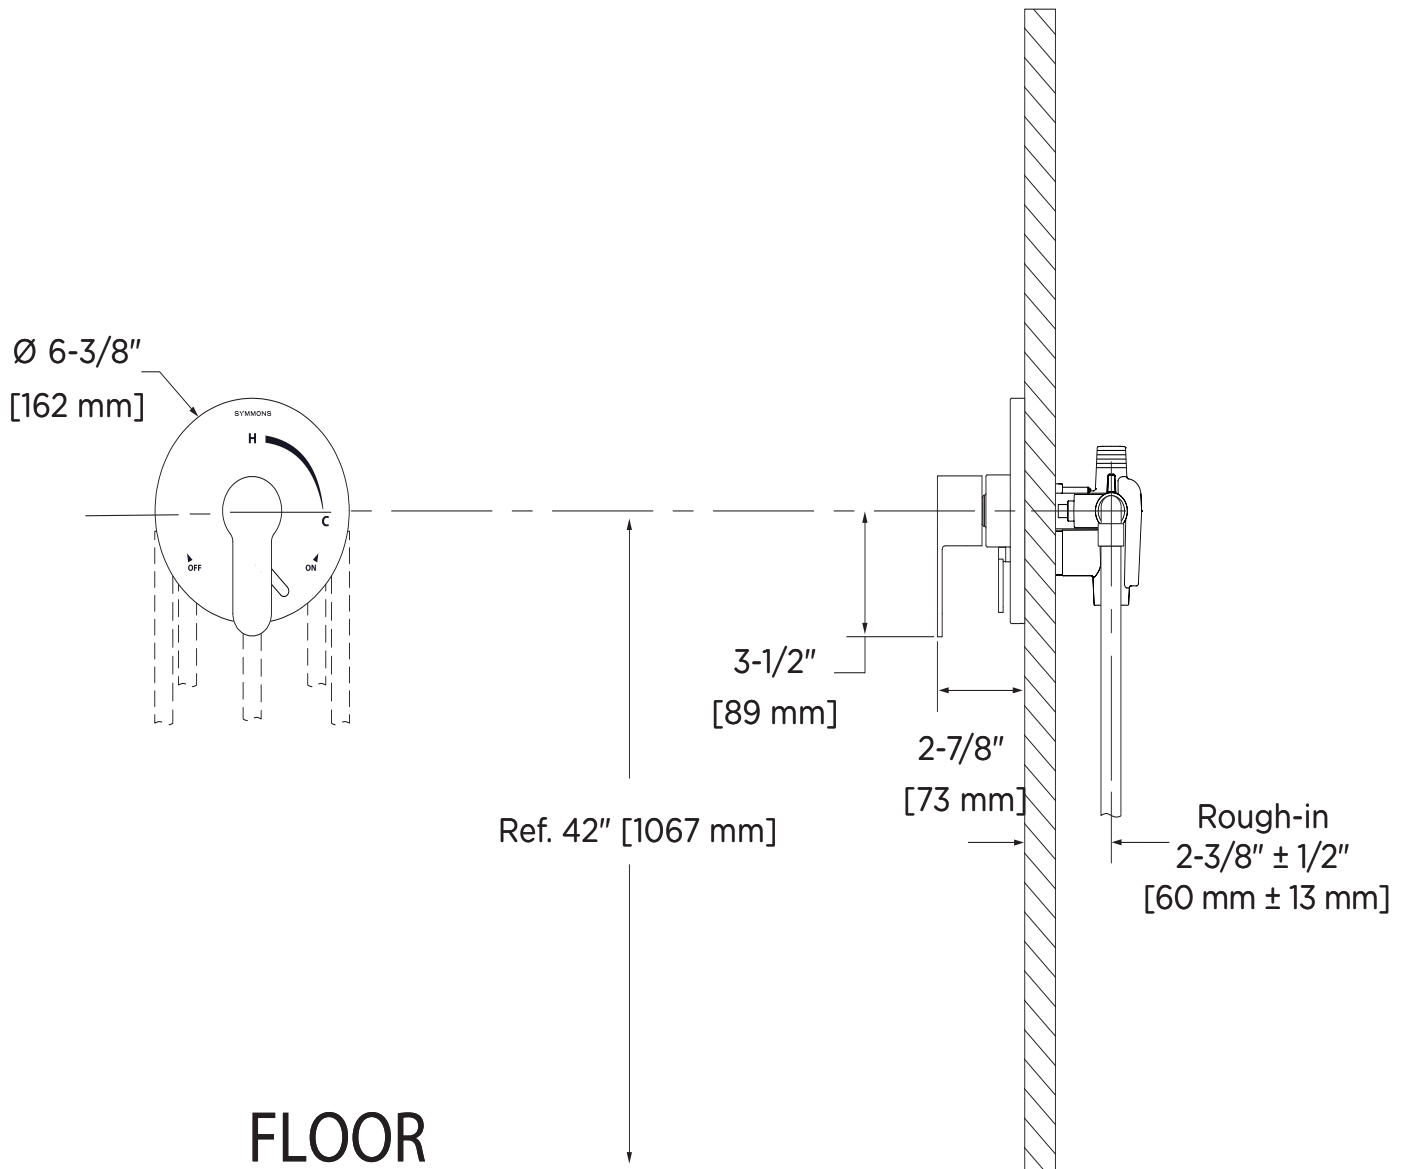

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.