

S6798TRM
Shower/Hand Shower Trim
Specification Submittal

Location:

Model Numbers **Options/Modifications**

S6798TRM
Shower/Hand Shower Trim

Valve Options:
-S262 series Temptrol Shower Valve with TRM modifier
-S162 series Temptrol Shower Valve with TC modifier

- 15 CG** 1.5 gpm (5.7 L/min) flow restrictor
- L1** Less showerhead
- L2** Less hand shower wand (wand only)
- L3** Less showerhead & hand shower wand (head and wand only)
- L4** Less head, arm and flange
- L5** Less hand shower system (less cradle, hose, wand and elbow)
- L7** Less handle
- TC** Test Cap Trim (includes TA-10&T-12A) *used with S162 series Temptrol Shower Valve*
- STN** Satin Nickel finish
- MB** Matte Black finish
- BBZ** Brushed Bronze finish

Feature Highlights

- Identity Shower/Hand Shower Trim.
- Requires Temptrol® Pressure Balancing Shower Valve.
- Integral diverter control.
- Metal lever handle.
- Cradle for hand shower wand.
- 60" flexible metal hose.
- Single mode hand shower with NPSO.
- Dual checks for backflow protection.
- Single mode showerhead.
- Standard 2.0 gpm (7.6 L/min) flow restrictors.
- Components shall be metal and nonmetal construction, plated in standard polished chrome finish.

Compliance

- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min)
2.0 gpm (7.6 L/min)
- Lever handle meets ADA requirements for operation.



Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.
10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



SKU Builder


Series	Finish	Modifier	Flow Rate	TRM (required)	TC	Final SKU
S6798	STN		15	TRM		S6798STN15TRM
S6798	MB	L2		TRM	TC	S6798MBL2TRMTC

Note: No more than two modifiers (L1-L7) and modifier order will follow numerical order.

Architectural/ Engineering Specification

Symmons Identity Shower and Hand Shower Trim _____ Includes Identity Shower and Hand Shower Trim powered by Temptrol® Pressure Balancing Shower Valve. Features integral diverter control, metal lever handle, cradle for hand shower wand, 60" flexible metal hose, single mode hand shower with NPSO, dual checks for backflow protection, single mode showerhead, and standard 2.0 gpm (7.6 L/min) flow restrictor. Components shall be metal and nonmetallic construction, plated in standard polished chrome finish. 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm and 2.0 gpm complaint. Lever handle meets ADA requirements for operation. Available options include: "15 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L2 - Less hand shower wand", "L3 - Less showerhead & hand shower wand", "L4 - Less head, arm and flange", "L5 - Less hand shower system", "L7 - Less handle", "TC - Test Cap Trim", "BBZ - Brushed Bronze finish", "STN - Satin nickel finish", and "MB - Matte Black finish".

Dimensions

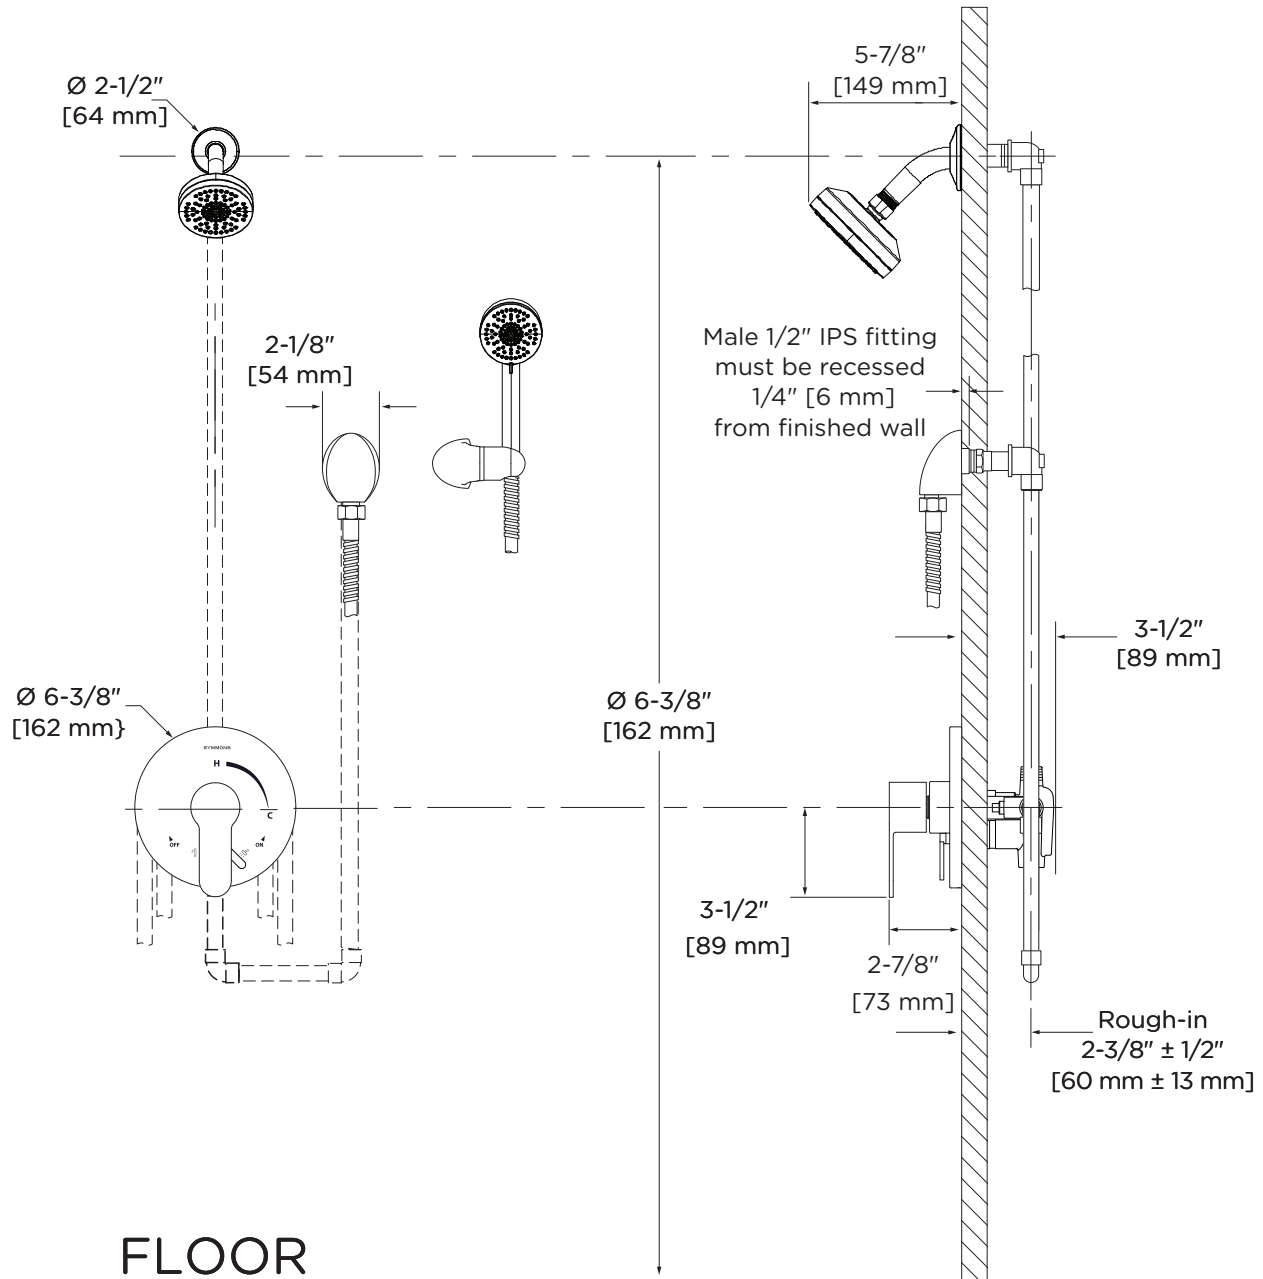

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls $1/2''$ or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.