




Location:





4-231
2 Mode Showerhead
Specification Submittal

Model Numbers	Feature Highlights
<input type="checkbox"/> 4-231 2 mode showerhead	<ul style="list-style-type: none"> • 2 mode showerhead • 3-5/16" diameter • Female ball joint adapter • Standard 2.0 gpm (7.6 L/min) flow restrictor
Options/Modifications <input type="checkbox"/> -1.5  1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> -STN Satin Nickel finish Note: Append appropriate -suffix to model number.	Warranty Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.
Compliance - ASME A112.18.1/CSA B125.1 - WaterSense 1.5 gpm, 2.0 gpm <div style="text-align: right;">  </div>	

Architectural/Engineering Specification

Symmons 2 Mode Showerhead _____ Includes 2 mode showerhead, 3-5/16" diameter, Female ball joint adapter, Standard 2.0 gpm (7.6 L/min) flow restrictor. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm, 2.0 gpm compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "STN - Satin Nickel finish".

Dimensions

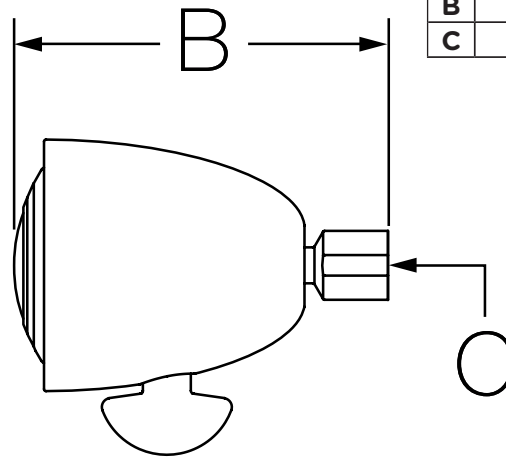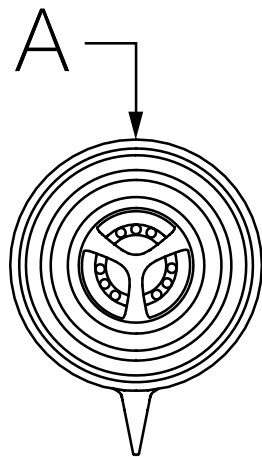

Measurements	
A	Ø 3-5/16", 84 mm
B	4-5/8", 117 mm
C	1/2-14 NPT

Note: Dimensions subject to change without notice.