

## Kitchen Faucet S-2620-L

## Installation and Service Instructions

#### **Model Numbers**

S-2620-L.....Chrome finish S-2620-STN-L....Satin Nickel finish S-2620-STS-L....Stainless Steel finish

#### Tools & Materials




### Need Help?

Symmons customer service: (800) 796-6667, (781) 848-2250 Email: customerservice@symmons.com Monday - Friday 7:30 am - 7:00 pm EST

www.symmons.com/service

- Technical help
- Product information
- Warranty policy.

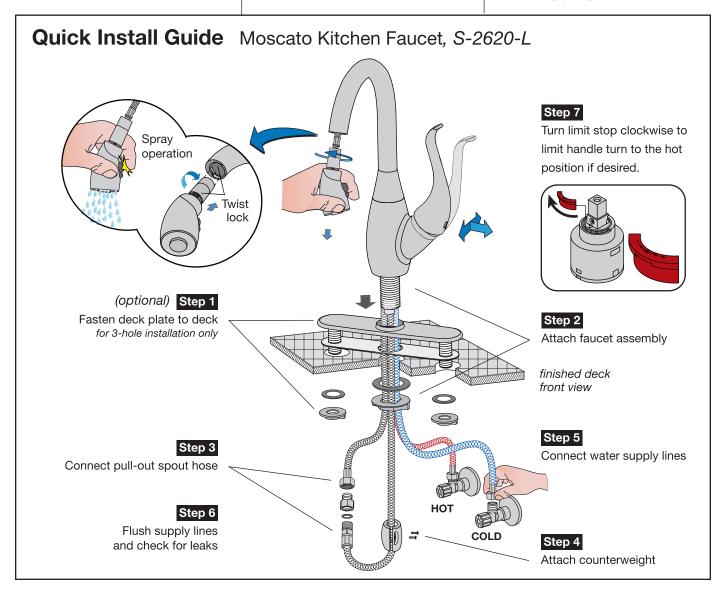




# **Installation Instructions**


**Caution:** If replacing an older faucet ensure water supply is turned OFF before removing and then turn faucet ON to relieve water pressure.

#### Step 1 Attach deck plate to deck (optional)


Deck plate is typically used for covering existing holes when faucet is being replaced. Install as required.




Step 2 Attach faucet assembly to deck

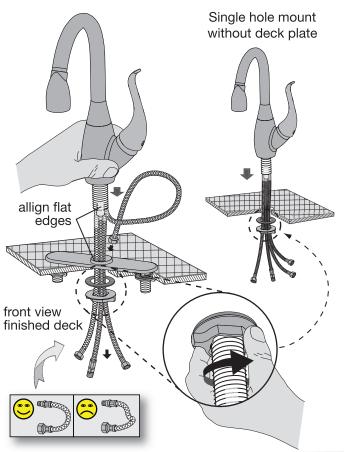



Step 3 Connect pull-out spout hose

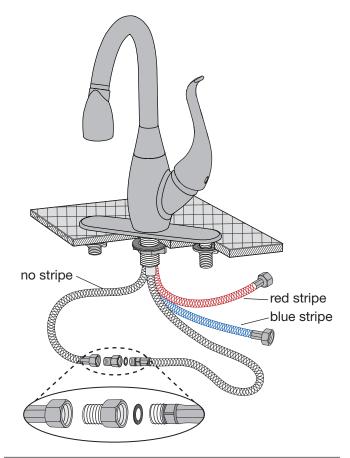




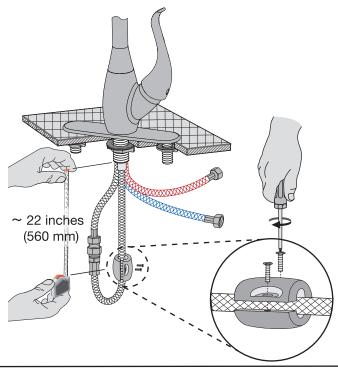






Step 6 Flush supply lines and check for leaks

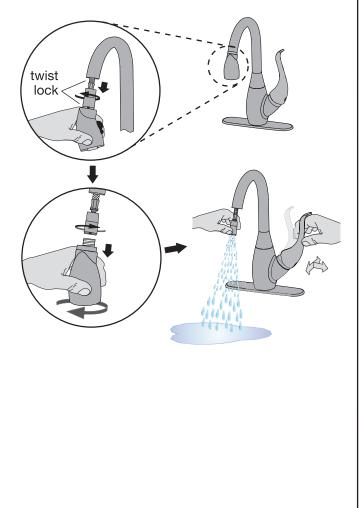



### Care of faucet finish


Clean finish area by using mild soap and water or non-abrasive cleaner and then rinse immediately. A non-abrasive wax may be used to preserve finish area.

### Valve cartridge replacement







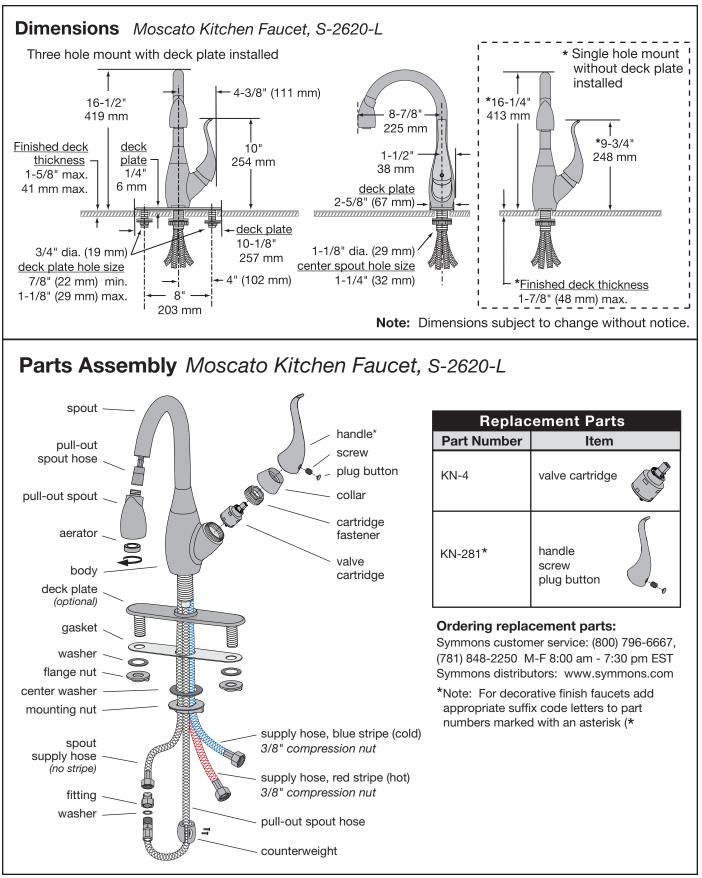

For California Residents

WARNING: This product contains chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.

Symmons Industries, Inc. 
31 Brooks Drive 
Braintree, MA 02184 
Phone: (800) 796-6667 
Fax: (800) 961-9621
Copyright © 2017 Symmons Industries, Inc. 
symmons.com 
gethelp@symmons.com 
ZV-548 REV A 
101617