
TAG:	
170.	

# Workboard Mixing Faucet

#### **Architect/Engineering Specifications:**

8" deck mount mixing faucet with chrome plated brass body, 12" swing nozzle with 2.2 GPM aerator, compression cartridges with spring checks, lever handles, 1/2" NPT male inlets, chrome plated escutcheon, 96" flexible stainless steel hose, spray valve and deck flange. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.

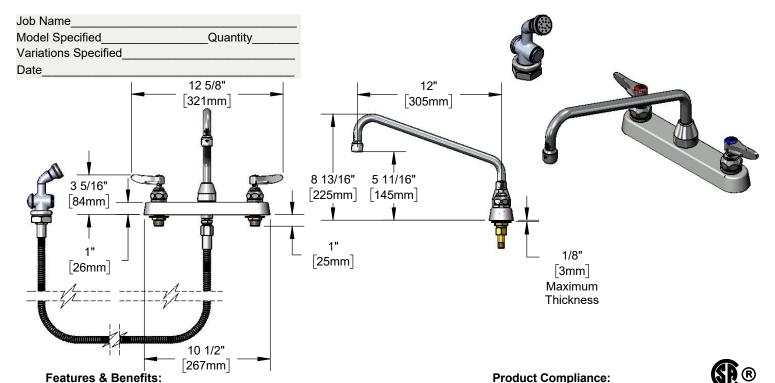

- 8" deck mount mixing faucet w/ chrome plated brass body
- 12" swing nozzle
- 2.2 GPM aerator, Series 1 (B-0199-01)
- Quarter-turn Eterna compression cartridges with spring checks to prevent cross flow of water
- Lever handles w/ color coded indexes
- 1/2" NPT male inlets
- Tailpieces and nuts for 1/4" NPT male connections
- Chrome plated escutcheon
- Self-closing spray valve with 96" flexible stainless steel hose and deck flange hose guide
- Material: Chrome plated brass body, tubular spout & spray valve body and chrome plated metal handles & escutcheon

### Optional Outlets (Series 1 / VR Series 6)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)
0.35	N/A	□ B-0199-01-N035	N/A	□ B-0199-06-N035
0.5	N/A	□ B-0199-01-N05	N/A	□ B-0199-06-N05
1.0	□ B-0199-01-F10	N/A	□ B-0199-06-F10	N/A
1.5	□ B-0199-01-WS	□ B-0199-29	□ B-0199-06-WS	□ B-0199-29VR
2.2	Standard	□ B-0199-21	□ B-0199-06	☐ B-0199-21-VRF

#### **Product Compliance:**

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)



Warranty: One Year (Limited)

#### **Performance Data:**

Pressure: 20 - 125 psi Temperature: 40 °F -140 °F

Flow Rate:

Nozzle: 2.2 GPM @ 60 psi Sidespray: 2.53 GPM @ 60 psi

## **Optional Handles**

- □ 4" Wrist Action
- □ Lever (Standard)

#### **Optional Cartridges With Checks**

- □ Quarter-Turn Cerama w/ Check Valve
- □ Quarter-Turn Eterna w/ Spring Check (Standard)







