




### Architect/Engineering Specifications:

24" maximum concealed deck mount mixing faucet with brass body, polished chrome plated cast spout with 2.2 GPM aerator, compression cartridges, flexible supplies, lever handles, polished chrome plated escutcheons and 1/2" NPSM male inlets with coupling nuts. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

Job Name \_\_\_\_\_  
 Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_  
 Variations Specified \_\_\_\_\_  
 Date \_\_\_\_\_

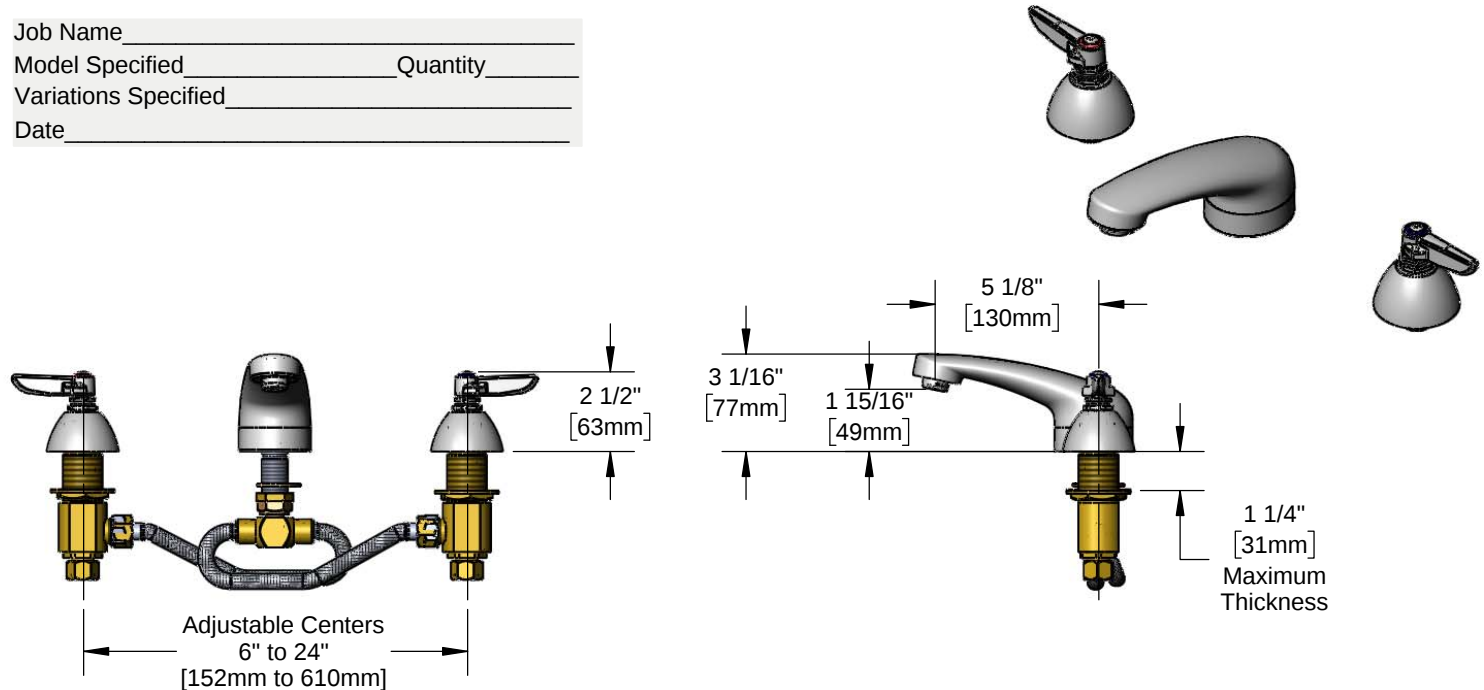

### Features & Benefits:

- 24" concealed deck mount mixing faucet w/ brass body
- Polished chrome plated brass cast spout
- 2.2 GPM aerator, Series 3 (B-0199-03)
- Lever handles with color coded indexes
- Eterna compression cartridges
- Flexible Supplies between side bodies and center body
- $\phi 2 \frac{1}{4}$ " [57mm] escutcheons
- 1/2" NPSM male inlets w/ coupling nuts
- Material: Brass body, chrome plated metal handles & polished chrome plated escutcheons & cast spout

### Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

### Warranty: One Year (Limited)

### Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 2.2 GPM @ 60 psi



### Optional Outlets (Series 3 / VR Series 8)

| GPM  | Aerated                               | Non-Aerated (Laminar)                   | VR Aerated                            | VR Non-Aerated (VR Laminar)              | Optional Cartridges                            |
|------|---------------------------------------|-----------------------------------------|---------------------------------------|------------------------------------------|------------------------------------------------|
| 0.35 | N/A                                   | <input type="checkbox"/> B-0199-03-N035 | N/A                                   | <input type="checkbox"/> B-0199-08-N035  | <input type="checkbox"/> Quarter-Turn Cerama   |
| 0.5  | N/A                                   | <input type="checkbox"/> B-0199-03-N05  | N/A                                   | <input type="checkbox"/> B-0199-08-N05   | <input type="checkbox"/> Eterna (Standard)     |
| 1.0  | N/A                                   | N/A                                     | N/A                                   | <input type="checkbox"/> B-0199-08-LF-10 | <input type="checkbox"/> Quarter-Turn Eterna   |
| 1.5  | <input type="checkbox"/> B-0199-03-WS | N/A                                     | <input type="checkbox"/> B-0199-08-WS | N/A                                      | <input type="checkbox"/> Push Button Metering  |
| 2.2  | Standard                              | <input type="checkbox"/> B-0199-26      | <input type="checkbox"/> B-0199-08    | <input type="checkbox"/> B-0199-28       | <input type="checkbox"/> Pivot Action Metering |
|      |                                       |                                         |                                       |                                          | <input type="checkbox"/> Wrist Action Metering |

