


ChekPoint Electronic Sensor Faucet

## Architect/Engineering Specifications:

Single hole deck mount electronic sensor faucet with polished chrome plated brass body with integral spout, 2.2 GPM vandal resistant aerator, AC/DC control module with internal flow control setting switches, temperature control mixing valve with check valves, hydro-generator power supply and 18" flexible stainless steel supply hoses with 3/8" compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372 and UL 1951. Meets ADA ANSI/ICC A117.1 requirements.

Job Name	
Model Specified	Quantity
Variations Specified	/ <u></u>
Date	

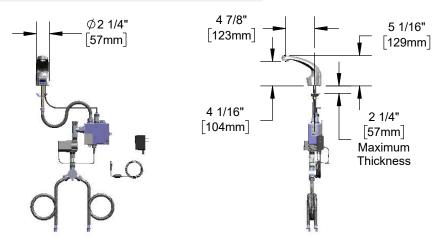



#### Features & Benefits:

- Single hole deck mount faucet w/ polished chrome plated brass body w/ integral spout
- 2.2 GPM vandal resistant aerator, Series 8 (B-0199-08)
- Water resistant control module w/ internal flow control switches for adjusting auto time out & shut off delay settings
- Optional auto flush feature flows water for 30 seconds after every 12 inactive hours
- Hydro-generator power supply
- (4) AA battery (DC) power option
- Mechanical temperature mixing valve w/ check valves
- 18" flexible stainless steel supply hoses w/ 3/8" compression inlet connections
- Low battery LED indicator light
- Material: Polished chrome plated brass body

### Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)
- UL 1951

Warranty: Three Year (Limited)

### Performance Data:

- Pressure: 20 125 psi
- Temperature: 40 °F 140 °F
- Flow Rate: 2.2 GPM @ 60 psi
- Water Consumption: @10 sec=.37 gal @15 sec=.55 gal



ADA Compliant

# Optional Outlets (Series 3 / VR Series 8)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)	Optional Deck Plates
0.35	N/A	□ B-0199-03-N035	N/A	□ B-0199-08-N035	□ 4" Chrome Plated Brass Deck Plate
0.5	N/A	□ B-0199-03-N05	N/A	B-0199-08-N05	B" Chrome Plated Brass Deck Plate
1.0	N/A	N/A	N/A	B-0199-08-LF10	
1.5	□ B-0199-03-WS	N/A	□ B-0199-08-WS	B-0199-08-LF15	
2.2	□ B-0199-03	□ B-0199-26	Standard	□ B-0199-28	



