



# T&S BRASS AND BRONZE WORKS, INC.


2 Saddleback Cove / P.O. Box 1088  
Travelers Rest, SC 29690

Model No.

**EC-TMV**

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

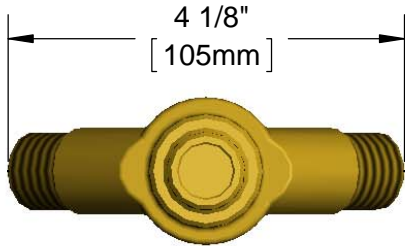

This Space for Architect/Engineer Approval

Job Name \_\_\_\_\_ Date \_\_\_\_\_

Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_

Customer/Wholesaler \_\_\_\_\_

Contractor \_\_\_\_\_

Architect/Engineer \_\_\_\_\_

Mixed Water  
to Fixture



1/2" NPSM Male  
(3 Places)



Integral Check Valves  
Built into Hot and Cold Inlets

Check Valve Filter Screens  
(Included)

4 5/8"  
[118mm]

Hot Inlet

Cold Inlet

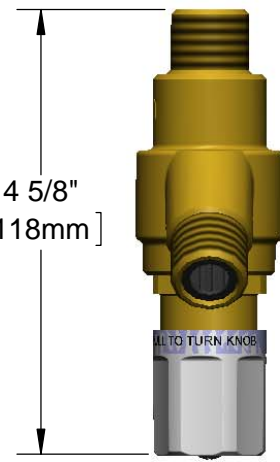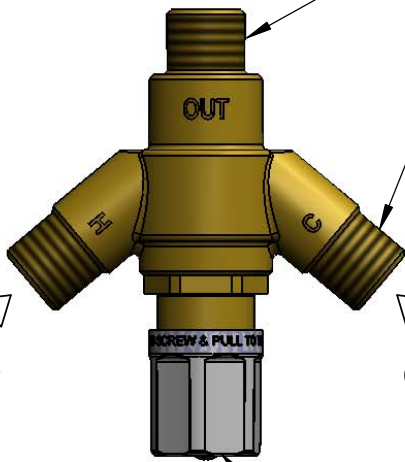

Locking Adjustment Knob Prevents Water from Exceeding Customer's Maximum Temperature Set Point.  
Valve is Factory Pre-set to Deliver Mixed Water Temperature of Approximately 100°F (38°C) Max.

### Performance Rating:

Minimum Flow Rate: 0.5 GPM  
Pressure Drop at Minimum Flow Rate: 0.5 psi  
Maximum Pressure: 125 psi  
Hot Water Inlet Temperature Range: 120~180°F (49~82°C)  
Outlet Temperature Range: 80~120°F (27~49°C)  
Outlet Temperature Factory Setting: Approx. 100°F (38°C)

Product Specifications:  
Thermostatic Mixing Valve with 1/2" NPSM Male Fittings

Product Compliance:  
NSF 61 - Section 9  
NSF 372 (Low Lead Content)  
ASSE 1070 (TMV)