


Hutch Pendant LED T20

DESCRIPTION

The Hutch LED pendant light from Tech Lighting features clean modern lines that clearly harmonize with the soft matte and raw aluminum finishes available in this scaled-up stamped metal pendant light. To ensure proper light scaling for both residential lighting applications such as kitchen island lighting or dining room lighting, as well as commercial lighting applications such as hospitality lighting or hallway lighting, the Hutch pendant light includes the choice of high output and low output LED modules. To ensure maximum flexibility, 25° and 40° beam spread options, 60" of variable-length rigid stems and universal ELV and 0-10v dimming capability are included as standard features. Low Output. 120 volt 18 watt, 1392 delivered lumen, 2700K or 3000K LED module. High Output. 120-277 volt universal 48 watt, 1807 delivered lumen, 2700K or 3000K LED module. Choice of 25° or 40° field changeable optics. High-Output dimmable with with low-voltage electronic or 0-10v dimmer. Low-Output dimmable with with low-voltage electronic dimmer only. Fixture provided with 60 inches of variable rigid stems (includes (2) 6 inch and (4) 12 inch) in coordinating finish. Can be installed on sloped ceiling up to 45°.

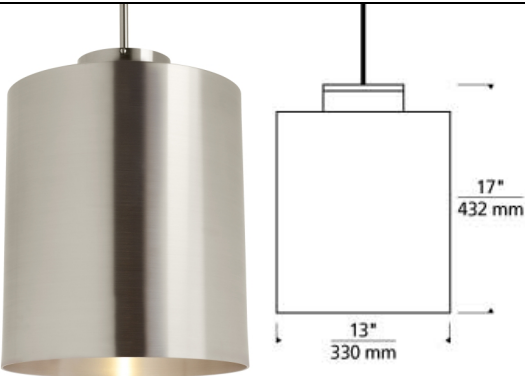

INSTALLATION

Integrated ball joint accommodates sloped ceilings up to 45°.

WEIGHT

10-10.5lb / 4.54-4.76kg ±



ORDERING INFORMATION

700	SYSTEM	HTCP	BEAM SPREAD	FINISH	LAMP
TD	LINE-VOLTAGE PENDANTS/SUSPENSION		25	25°	A BRUSHED ALUMINUM -LEDHI927 LED HI-OUTPUT 90 CRI 2700K 120V-277V UNV (T24)
			40	40°	B MATTE BLACK -LEDHI930 LED HI-OUTPUT 90 CRI 3000K 120V-277V UNV (T24)
					W MATTE WHITE -LEDLO927 LED LO-OUTPUT 90 CRI 2700K 120V (T24)
					-LEDLO927-277 LED LO-OUTPUT 90 CRI 2700K 277V
					-LEDLO930 LED LO-OUTPUT 90 CRI 3000K 120V (T24)
					-LEDLO930-277 LED LO-OUTPUT 90 CRI 3000K 277V



TECH LIGHTING®

7400 Linder Avenue T 847.410.4400
Skokie, Illinois 60077 F 847.410.4500

Tech Lighting, L.L.C.

700 HTCP

FIXTURE TYPE:

JOB NAME:

NOTES: