

FLOOR FIXTURES

GENERAL PRODUCT INFORMATION:

This product is suitable for indoor dry locations only.


The anchors provided with this product are for drywall. Use proper anchors for mounting onto other type of surfaces.

This product is suitable for dry locations only.






Installing the Switch

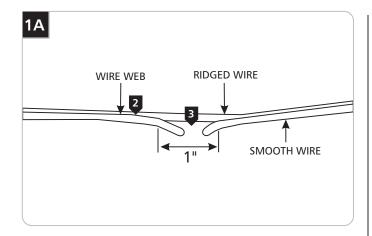


- 1 Choose a place on the cord where the switch is to be mounted.
- With a sharp knife cut about a 1" slot in the cord web.

 Make sure not to nick the insulation on either wire.
- 3 Cut the smooth wire in half.

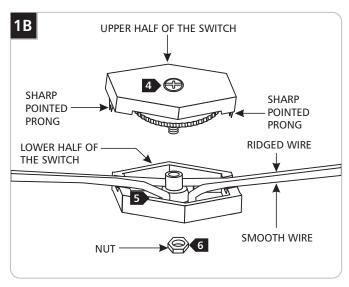

- 4 Loosen the screw on upper half of the switch to remove the nut on the lower half.
- Place the cord in the lower half of the switch (the half without the wheel). The cut wire runs through the center of the switch.
- Press both halves back together. Replace the nut in the lower half and tighten the screw on upper half so that the sharp pointed prongs in upper half of the switch pierce the wire insulation and make contact inside.

Installing the Lamp

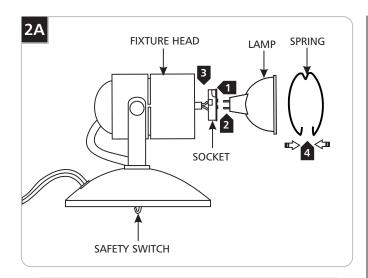

CAUTION: To reduce the risk of a burn or electric shock during relamping, disconnect the power to the fixture.

NOTE: Use only your fingers and a soft cloth to replace the lamp.

For Lil Wonder, use **MAX** 35 Watt, MR11 Front Cover Halogen Lamp.



For Lil Big Wonder, use **MAX** 50 Watt, MR16 Front Cover Halogen Lamp.



- Carefully pull a little portion of the socket out of the fixture head.
- **2** Gently push the lamp pins all the way into the socket holes.
- Place and position the socket and lamp into the fixture head.
- 4 To secure the lamp, squeeze the spring ends and push the spring onto the fixture head. Release the spring ends.

IMPORTANT SAFETY INSTRUCTIONS

To reduce the risk of fire, electrical shock, exposure to excessive UV radiation, or injury to person:

- Use this fixture indoors only.
- Do not look directly at the lighted lamp.
- Do not remain in light if skin feels warm.
- Risk of fire: Use only the type of lamp and maximum wattage indicated in this instruction manual.
- Never cover the halogen lamp with anything other than a Tech Lighting lamp shield and never place flammable material close to your fixture.
- Never turn the fixture on and off by connecting and disconnecting the halogen lamp.
- Do not touch the fixture shades or lamp shield while the fixture is on. These surfaces may be HOT.

Halogen Lamp General Information

 A new halogen lamp may smoke slightly when it is used for the first time. This is perfectly normal; the protective coating is simply being vaporized.

Two Tips For Prolonging Halogen Lamp Life

- First avoid touching the lamp with bare hands during installation. Any contaminant, even the oil from your hands can deteriorate the lamp. Rubbing alcohol can be used to remove any contaminant.
- Second, do not run the lamps at full power when you do not need to. However, if dimming the fixture for an extended period of time, occasionally bring the light up to full brightness for a few minutes to complete the halogen cycle.

SAVE THESE INSTRUCTIONS!



7400 Linder Ave, Skokie, IL 60077 847.410.4400

www.techlighting.com

© 2008 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company