

Spot Head



DESCRIPTION

Classic head rotates 360° around stem, pivots 290°. Can hold one lens or louver (sold separately). Low-voltage, MR16 lamp of up to 50 watts (not included).

SYSTEM

Available for FreeJack, MonoRail, Two-Circuit MonoRail, and Wall MonoRail. For use on T-trak, order FreeJack version and T-trak FreeJack Connector (sold separately).

INSTALLATION

Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system.

ACCESSORIES & OPTICAL CONTROLS


Colored Lens, Dichroic Lens, Diffuser Lens, Eggcrate Louver, Linear Spread Lens, Soft Focus Lens, UV Filter

WEIGHT

0.84lb / 0.38kg

ORDERING INFORMATION

700	SYSTEM	SPT6	LENGTH	FINISH
FJ	FREEJACK (MONO POINT)		04 4.5"	C CHROME
MO	MONORAIL		06 6"	S SATIN NICKEL
MO2	TWO-CIRCUIT MONORAIL		12 12"	
WMO	WALL MONORAIL		18 18"	

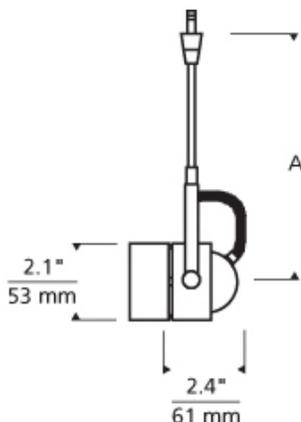

TECH LIGHTING®

7400 Linder Avenue T 847.410.4400
 Skokie, Illinois 60077 F 847.410.4500

www.techlighting.com

700 _____ SPT6 _____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____

