


TWO - CIRCUIT MONORAIL

Two-Circuit MonoRail Center Power Feed Dual-Feed

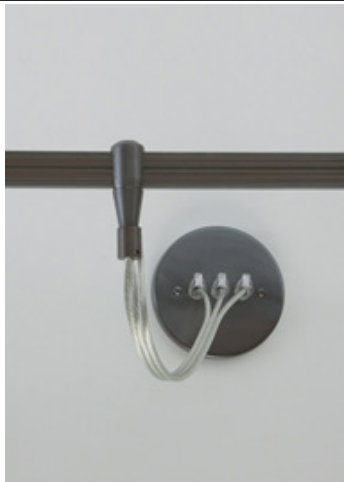

DESCRIPTION

Center Power Feeds are generally used to bring power to a Two-Circuit MonoRail system when the transformer or canopy cannot be located directly above the run. The center power feed can be used anywhere within the run and includes a removable 4" round canopy and 12' field-cuttable softwire leads. Specify dual-feed when using a dual-feed transformer. Dual-feed canopy includes isolating connectors.

INSTALLATION

This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box (not included), directly to a remote transformer (sold separately).


WEIGHT

1.95lb / 0.88kg

ORDERING INFORMATION

700MO2PCEN4 FINISH

- Z ANTIQUE BRONZE
- C CHROME
- S SATIN NICKEL



TECH LIGHTING®

7400 Linder Avenue
Skokie, Illinois 60077

T 847.410.4400
F 847.410.4500

www.techlighting.com

700MO2PCEN4 _____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____



©2011 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C.
Tech Lighting reserves the right to change specifications for product improvements without notification.