

INSTALLATION INSTRUCTION

For Outdoor Lantern (Rev. 06/05/2007)

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

PREPARATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box. If necessary, remove old fixture and all mounting hardware from wall junction box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Attach the Circular Strap (A) to the junction box with the two Junction box screws (B) as shown. The side of the Circular Strap marked "GND" must face out.
4. Thread the Studs (C) into the pre-drilled holes in the Circular Strap (A) spaced the same distance apart as the holes in the Back-plate.

CONNECTING THE WIRES (Fig. 2)

5. Connect the fixture wires to the junction box wires as shown in the wiring diagram. Making sure all wire connectors are secured and do not easily pull off with a slight tug. If there is no Green Ground wire from the junction box, connect the Fixture Ground Wire to the circular strap with the green Screw provided.

COMPLETING THE INSTALLATION

6. To prevent moisture from entering the outlet box and causing a short, use clear caulking (i.e. Indoor/Outdoor Silicone Sealant) to outline the outside of fixture back-plate where it meets the wall leaving a space at bottom to allow moisture a means to escape (Fig.7).
7. Thread Backplate (D) onto Studs (C) and secure with Knurled Knobs (E).
8. This ballast is replaceable. To uninstall the ballast see Fig.3 or Fig.5. To reinstall the ballast see Fig.4 or Fig.6.
9. Install the PL bulb (included) in accordance with the fixture's specification. **(DO NOT EXCEED THE SPECIFIED WATTAGE!)**
10. This fixture contains an integrated photo sensor that automatically prevents operation during daylight hours.
11. This fixture is rated for a minimum start temperature of -18° Celsius.
12. This fixture is UL Listed for Wet Location applications.

Your installation is now complete. Return the power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

LIMITED WARRANTY

The Minka Group warranty covers for a period of two Years from the day of purchase the replacement or repairs of the fixture housing and electrical components. This warranty is limited in that it does not include the lamp (bulb) or finish.



american
lighting
association

Fig. 1

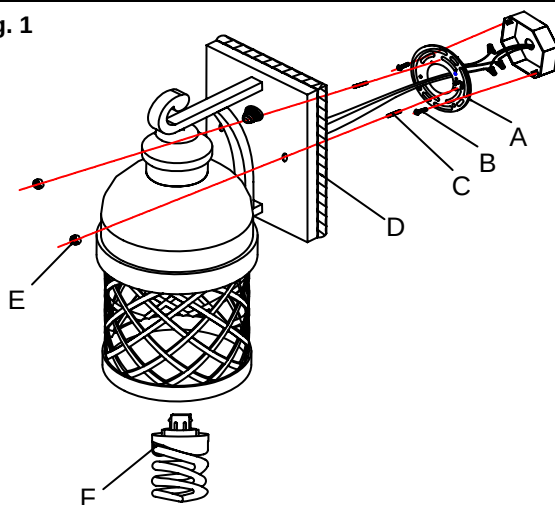


Fig. 2

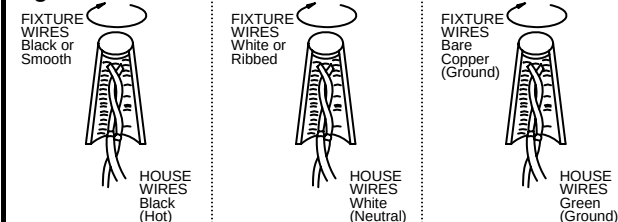


Fig. 7

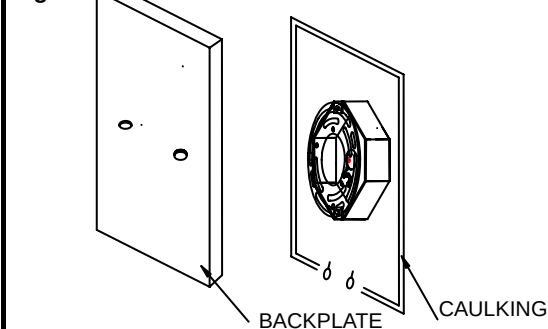


Fig.3




Fig.4




Fig.5




Fig.6

