

INSTALLATION INSTRUCTIONS

For Model 72414-51A-L

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
2. Attach the cage to roof (J) with cap nuts (S).
3. Thread nipple (E) into loop (G) until snug and secure with lock washer (D) and hex nut (C). Attach the crossbar assembly to the outlet box with screws (B). The side of the cross bar marked "GND" must face out.
4. Use a pair of proper pliers to open one end link of the chain provided and connect to the fixture loop (I). Determine the desired hanging height and discard the excess chain.
5. Lace the fixture wires through the chain. Slip lock collar (H) over the chain followed by canopy (F) and allow them to rest on the fixture top cover.
6. Open the other end link of chain and attach to loop (G). Feed the fixture wires through the loop (G) and the nipples (E).

CONNECTING THE WIRES (Fig. 2)

7. Connect the electrical wires as shown in Fig.2. Making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the crossbar using the green screw provided.

COMPLETING THE INSTALLATION (Fig. 1)

8. Align canopy (F) to the ceiling and use lock collar (H) to secure canopy (F) to chain loop (G).
8. Bulb (H) information: (1 x AC LED 10W included.)

DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Replacing LED module (Fig. 4)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig 4.)

- a. Remove top cover (J) by loosening cap nuts (S) (Fig.1), then remove aluminum cover (O) by loosening screws (K).
- b. Remove the wire nuts (L) hex-nuts (N) washers (M) and carefully remove the LED module (Q) for re-lamping. Note: The LED module should be provided by a specified supplier.
- c. For better heat dissipation the LED module (Q) should be installed with the heat transfer material (P) when re-lamping

Your installation is now complete. Return power to the junction box and test the fixture



Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

Fig. 1

Set A #A-016

-Cross bar

-Ground Screw

-Mounting Screws(2)

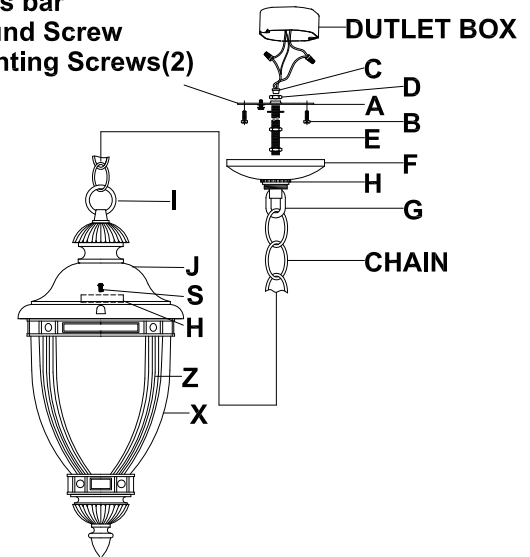


Fig. 2

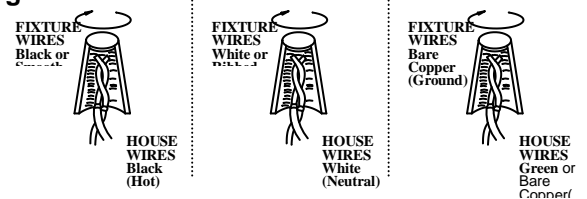


Fig. 3

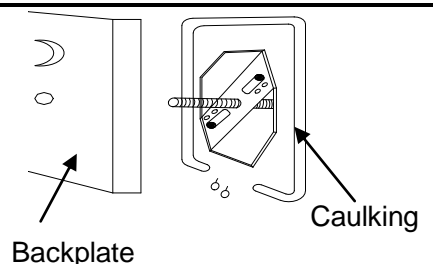


Fig. 4

