


SHOWER LIGHT

SL-xx*

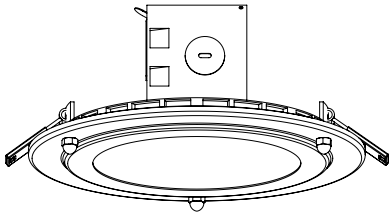

The low profile recessed in-shower light combines innovative technology, aesthetics, functionality and affordability. No housing or J-Box required for installation, the wet location installation listing provides the ultimate flexibility.

The low profile in-shower light can be mounted remotely for shallow ceiling installations. Energy efficient design provides up to a 75% energy savings and up to 54,000 hours of LED life. Flicker free dimming down to 10% with many Forward Phase (Triac) and Electronic Low Voltage (ELV) dimmers.

SHIPPING WEIGHT

Weight | 2.6 lbs.

Length | 10 in.

Width | 12 in.

Height | 12 in.

Performance:

- Input Power - 12.1w
- Input Voltage - 120V
- Input Frequency - 60Hz
- Lumens - 800
- CCT - 3000k
- Life(hours) - 54,000
- cCSAus Wet location listed
- Energy Star qualified
- California Title 24 JA8-2016
- 1 year warranty

FINISH CHART*

PC | Polished Chrome

SC | Satin Chrome

PB | Polished Brass

SB | Satin Brass

AB | Antique Brass

COP | Polished Copper

ACOP | Antique Copper

ORB | Oil Rubbed Bronze

PN | Polished Nickel

SN | Satin Nickel



MB | Matte Black

AN | Antique Nickel

BN | Black Nickel

PG | Polished Gold

WHT | White

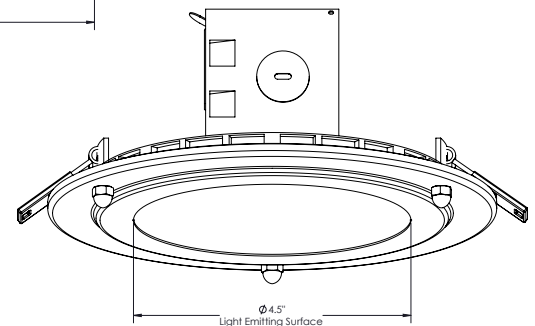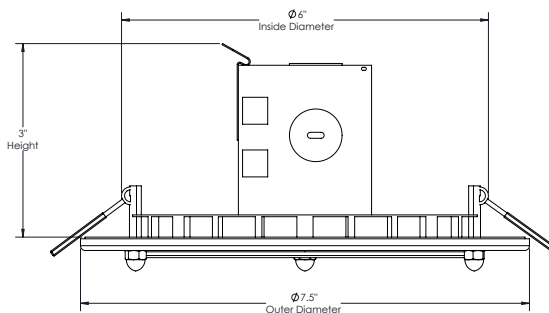

INSTALLATION NOTES

- Shower light can be installed in the shower
- steam vapor rises ensure the light is sealed completely to the ceiling.