

Classic Series Aero Rain Shower

FEATURES

- Air injected and pulsating AeroJet+™ technology
- 2.5 gpm (9.5 lpm) maximum flow rate
- 12" diameter spray face
- Rubber nozzels to prevent limescale build up



COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



PRODUCT SPECIFICATION

The shower shall have air injected and pulsating Aero-Jet+ technology. Product shall have 2.5 gpm (9.5 lpm) max. flow rate. Product shall have 12" diameter spray face. Product shall have rubber nozzels to prevent limescale build up. **Product shall be TOTO Model TS112B12#_____.**

Please note the following components are sold separately:



TS110MV16
Shower Arm Wall
Mount



TS110MC6
Shower Arm Ceiling
Mount

TS112B12



Classic Series Aero Rain Shower

SPECIFICATIONS


- Warranty: Lifetime Limited Warranty (Residential Use)
One Year (Commercial Use)
- Material: Brass
- Shipping Weight: 8.2 lbs.
- Shipping Dimensions: 13-1/8" x 14-1/8" x 4-1/4"
- Maximum Flow Rate: 2.5 gpm (9.5 lpm)

INSTALLATION NOTES

- Required Components:
- TS110MV16 (Wall Mount Shower Arm)
 - TS110MC6 (Ceiling Mount Shower Arm)

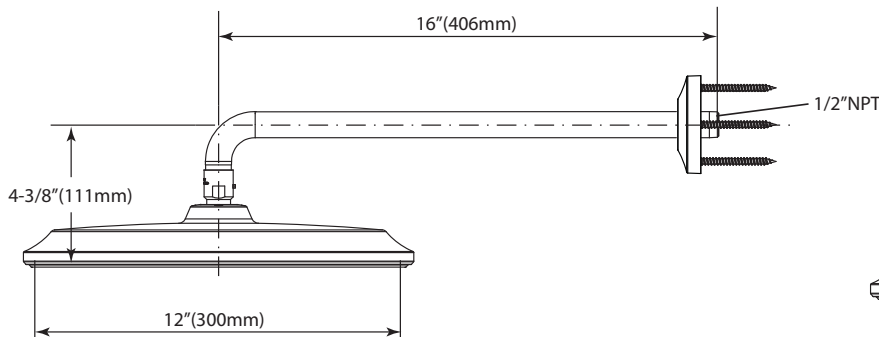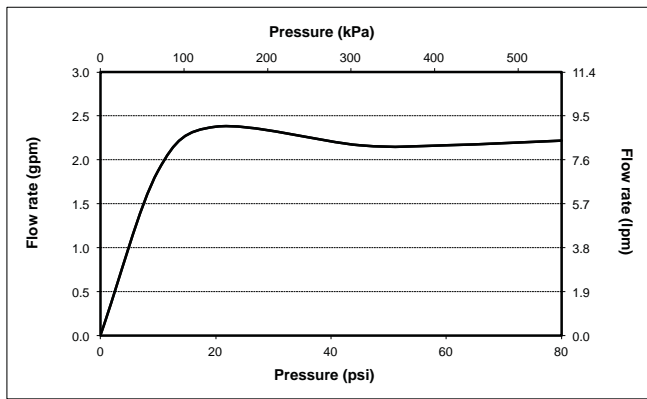

Shown with
TS110MV16

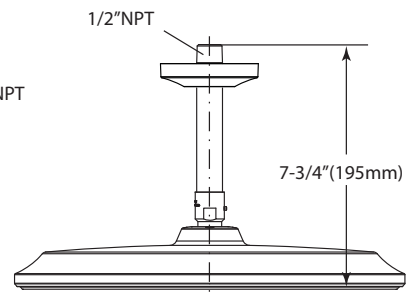

Shown with
TS110MC6