

# TOTO®

# CST474CUF(R)(G)

## Vespin® II 1G® Close Coupled High-Efficiency Toilet, 1.0GPF

### FEATURES

- Double Cyclone® flushing system, ultra low consumption (1.0GPF/3.8LPF)
- Skirted design
- SanaGloss® ceramic glaze - a highly smoothed surface for easier cleaning (not avail on Ebony #51)
- Universal Height
- Decorative two-piece design with high-profile tank
- Elongated front bowl and tank set, seat is not included
- 12" Uni-Fit rough-in (included)
- Optional 10"; 14" Uni-fit rough-in
- Chrome trip lever

### MODELS

- CST474CUFG  
With SanaGloss ceramic glaze
- CST474CUF  
Less SanaGloss ceramic glaze (#51 only)

### COMPONENTS

- CT474CUFG Elongated bowl with SanaGloss
- CT474CUF Elongated bowl, less SanaGloss
- ST453U Tank and cover only
- ST453UR Tank and cover only - right-hand trip lever
- SS224 SoftClose® seat (sold separately)
- SS214 SoftClose seat (sold separately)
- SS204 SoftClose seat (sold separately)
- SS114 SoftClose seat (sold separately)
- SS154 SoftClose seat (sold separately)
- TSU01W.10 10" rough-in (sold separately)
- TSU01W.14 14" rough-in (sold separately)

### COLORS/FINISHES

- #01 Cotton
- #03 Bone
- #11 Colonial White
- #12 Sedona Beige
- #51 Ebony (not available in SanaGloss)

### PRODUCT SPECIFICATION

The Two-Piece high-efficiency Double Cyclone flushing system toilet shall be 1.0GPF/3.8LPF. Universal Height Toilet with SanaGloss ceramic glaze finish. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever. Toilet shall be

**TOTO Model CST474CUF**\_\_\_\_ **TOTO Seat** \_\_\_\_\_.



**SanaGloss**

**CYCLONE®**  
FLUSHING SYSTEM BY TOTO

### CODES/STANDARDS

- Meets or exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, CALGreen Title 24, City of Los Angeles Water Efficiency Ordinance, California Energy Commission Standards
- ADA compliant (when installed with trip lever located on the approach side)



# CST474CUF(R)(G)

## Vespin® II 1G® Close Coupled High-Efficiency Toilet, 1.0GPF

### SPECIFICATIONS



- Water Use 1.0 GPF/3.8LPF
- Flush System Double Cyclone
- Min. Water Pressure 8 psi (flowing)
- Water Surface 6-7/8" x 9-3/4"
- Trap Diameter 2-1/8"
- Rough-in 12" (10" or 14" optional)
- Trap Seal 2-1/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight CT474CUF(G) 75lbs.  
ST453U(R) 28lbs.
- Shipping Dimensions CT474CUF(G)  
30-1/8" L x 16-3/4" W x 22" H

ST453U(R)  
18" L X 9-1/2" W  
X 16-1/2" H

### INSTALLATION NOTES

#### Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

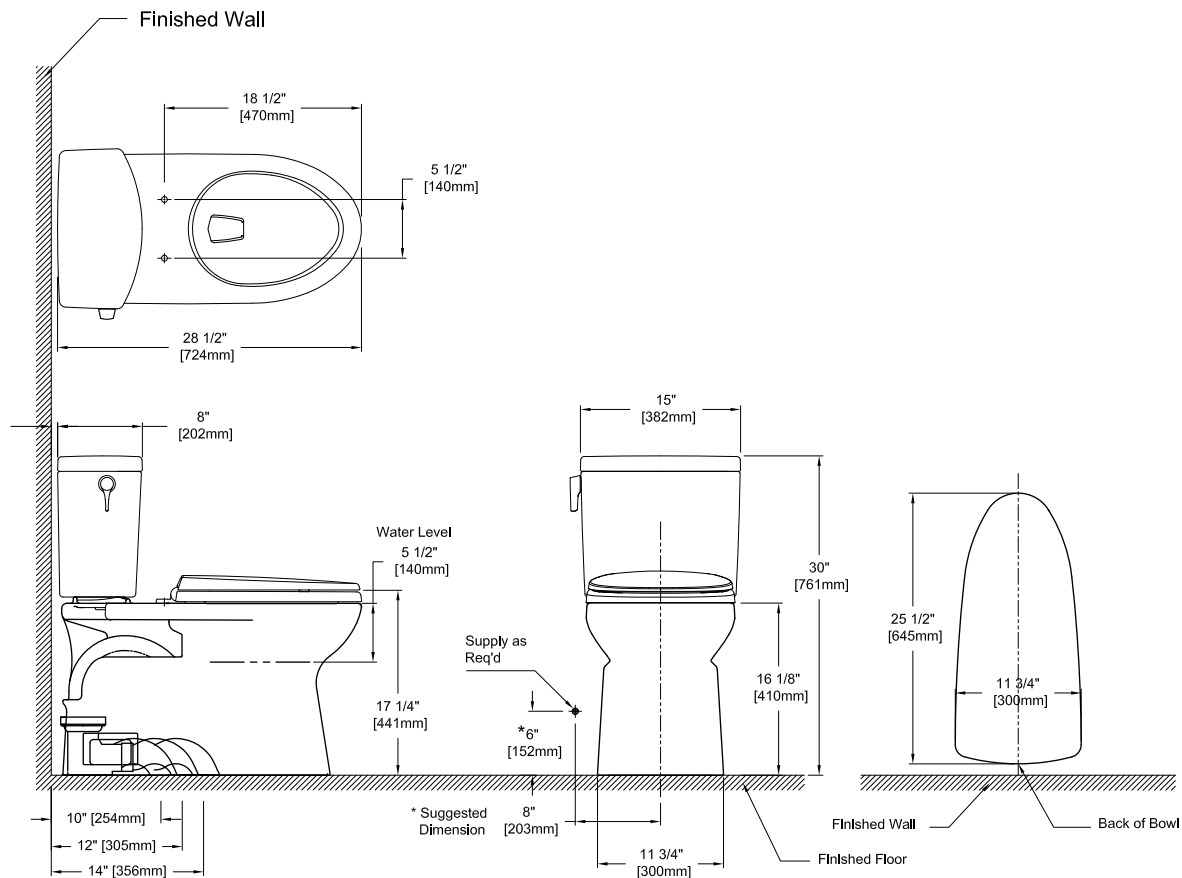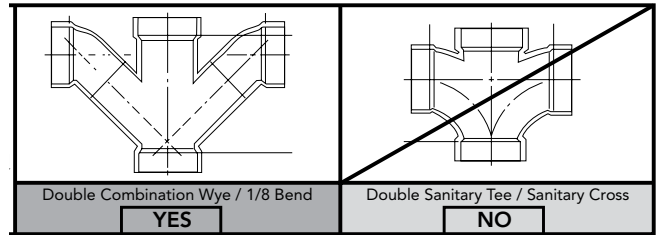

**TOTO®**

*These dimensions and specifications are subject to change without notice*