

Connelly® Close Coupled Toilet, 1.28 & 0.9 GPF with WASHLET®+ S550e

FEATURES

- Concealed supply connection for seamless installation
- 3D Tornado Flush® system, high-efficiency dual-flush 1.28 & 0.9 GPF (4.8 & 3.4 LPF)
- CeFiONtect® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Premist of bowl before each use
- Universal Height
- Elongated front bowl, WASHLET and tank set
- 12" Rough-in
- Chrome plated trip lever
- Remote control operated
- Auto open/close with night light

MODELS

- MW4943054CEMFG (#01)
With CeFiONtect ceramic glaze & WASHLET S550e with Classic design

COMPONENTS

- CT494CEMFT40
Elongated toilet with CeFiONtect
- ST494M
Tank and Cover
- SW3054T40
WASHLET® S550e with classic design
- 9AU321-A
WASHLET adapter

Optional Components

- TSU03W.10R
10" Unifit Rough-In
- TSU03W.14R
14" Unifit Rough-In

COLORS/FINISHES

- #01 Cotton



Tornado Flush



ewater+



CeFiONtect

PRODUCT SPECIFICATION

The one-piece high-efficiency 3D Tornado Flush system toilet shall be dual-flush 1.28 & 0.9 GPF (4.8 & 3.4 LPF). Toilet shall be 12" Unifit rough-in. Toilet shall have optional CeFiONtect ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl with Polished Chrome trip lever. Toilet shall be TOTO Model MW4943054CEMFG#01

See SW3054T40 Specification Sheet for details on included WASHLET.

CODES/STANDARDS

- Meets or exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)



MW4943054CEMFG

Connelly® Close Coupled Toilet, 1.28 & 0.9 GPF with WASHLET®+ S550e

SPECIFICATIONS


Water Use	1.28 & 0.9 GPF (4.8 & 3.4 LPF)
Flush System	3D Tornado Flush®
Min. Water Pressure	8 psi (Flowing)
Water Surface	5-5/8" x 4-1/8"
Trap Diameter	2-1/8"
Rough-in	12" (10" & 14" Optional)
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	CT494CEF(G)T40 70 lbs ST494M 31 lbs
Shipping Dimensions	CT494CEMFT40 30-3/4" L x 17-3/8" W x 20-1/2" H ST494M 17-1/4" L x 7-7/8" W x 17-1/2" H

See SW3054T40 Specification Sheet for details on included WASHLET.

INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

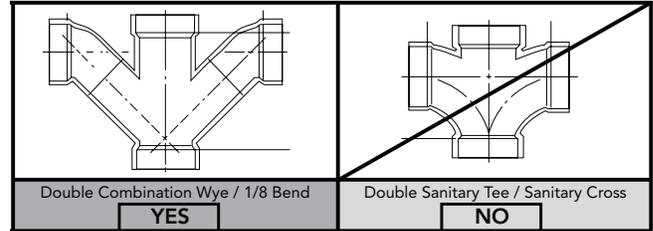

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

DIMENSIONS

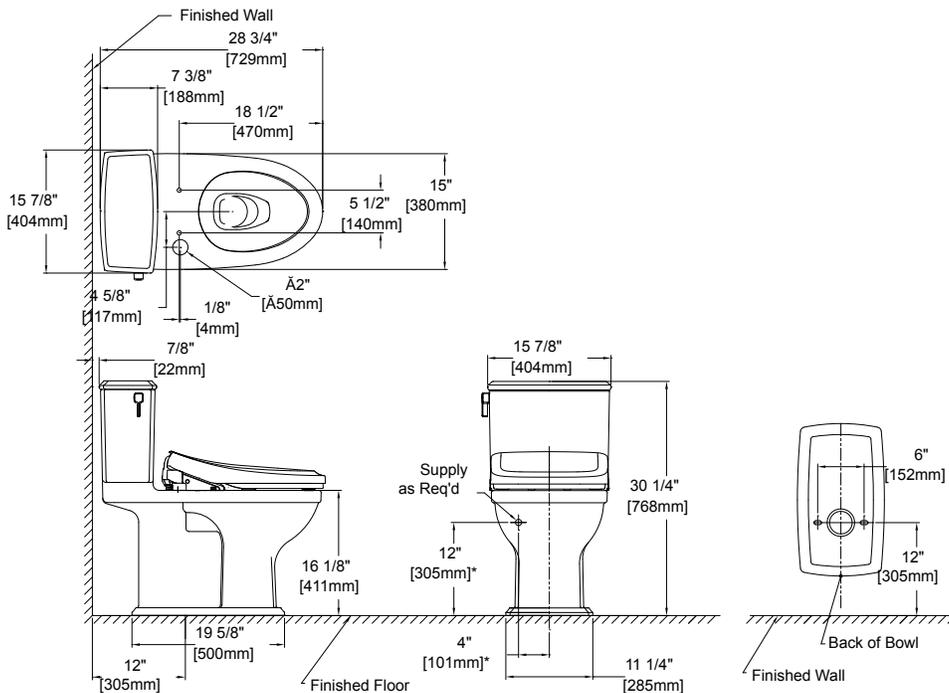

*Suggested Dimensions

TOTO®

These dimensions and specifications are subject to change without notice

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

SS-01342 v.02