

## Rain Shower Round 12" - 1.75 GPM

### FEATURES

- Single Function, contemporary-design round showerhead
- Balanced Comfort Wave® technology with wide coverage rinse & wash
- 12" (300 mm) diameter spray face
- WaterSense® certified high-efficiency 1.75 gpm (6.6 lpm)
- Rubber nozzles to prevent lime scale build up
- Meets 2018 California water efficiency appliance CEC regulations
- Includes matching escutcheon
- Shower arm sold separately

### COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel

### Made to order

- #PBR Polished Bronze
- #PFG Polished French Gold

### PRODUCT SPECIFICATION

Product shall be TOTO Model TBW07003U4#\_\_\_\_.  
 Product shall have comfort wave. Product shall have a maximum flow rate of 1.75 gpm (6.6 lpm). Product shall have a single spray. Product shall have 12" (300mm) diameter spray face. Product shall have rubber nozzles to prevent lime scale build up. Product shall meet 2018 California water efficiency appliance CEC regulations. Product shall include matching escutcheon. Product shower arm sold separately.

### CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, CEC, DoE, and others
- Complies with CA Prop 65 warning requirements



Please note the following components are sold separately



TBW07025U: Rain Shower Arm Wall-Mount, 16"




TS110MC6: Rain Shower Arm Ceiling Mount 6"

# TBW07003U4


## Rain Shower Round 12" - 1.75 GPM

### SPECIFICATIONS

Warranty	Lifetime Limited Warranty (Residential Use) One Year (Commercial Use)
Material	Brass
Maximum Flow Rate	1.75gpm (6.6lpm)
Shipping Dimensions	17-15/16" L x 14-7/16" W x 5-1/6" H
Shipping Weight	9 lbs

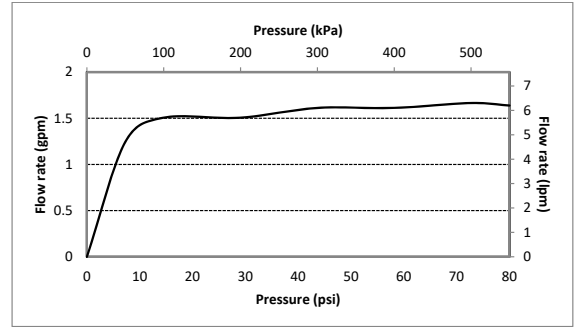

### DIMENSIONS

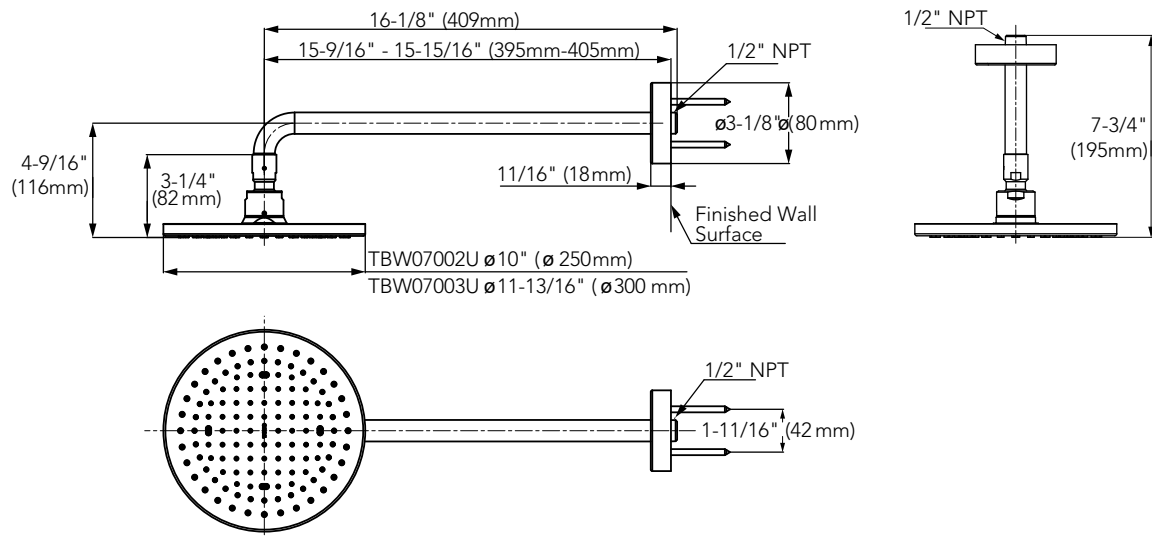

Note: The unit of above dimension is inch (mm).  
Note: Shower arm and mounting bracket are not included.