

TOTO®

CT705E Flushometer Toilet, 1.28GPF when used with High Efficiency Flushometer Valve



CT705E - Flushometer Toilet
SC534 - Commercial Toilet Seat
TET1LN32#CP - 1.28GPF ECO EFV - Automatic Flushometer Valve

- Low consumption 1.28 gallon flush when used with High Efficiency Flushometer Valve
- Elongated rim, siphon jet flush action
- 10"-12" rough-in
- Powerful and quiet flush

■ CT705E

Vitreous china low consumption elongated front rim, siphon jet flush action, floor mounted toilet, complete. Includes 1½" top spud and 2 bolt caps, less seat.

10"-12" rough-in.

□ SS114

SoftClose®Seat: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

□ SC134

Elongated, open front seat with cover.

□ SC534

Elongated, open front seat less cover.

Colors:

Standard #01 Cotton

Optional See price book for additional colors

*Recommended flushometer valve:
TOTO® Manual and Electronic Flush Valves
are highly recommended for maximum
performance.*

CT705E

Flushometer Toilet, 1.28Gpf when used with High Efficiency Flushometer Valve

■ PERFORMANCE

The TOTO® 1.28 Gpf flushometer toilet received high ratings during ANSI/ASME testing at independent test laboratories. Designed with a powerful siphon jet flushing action, the bowl offers a large 10-1/4" x 9-5/8" water surface.

■ SPECIFICATIONS

Water Use: 1.28 Gpf/4.8 Lpf
 Flush System: Siphon jet flushing action
 Min. Water Pressure: 35 psi static
 Water Surface: 10-1/4" x 9-5/8"
 Trap Diameter: 1-7/8"
 Rough-in: 10"– 12" rough-in
 Trap Seal: 2-3/8"
 Warranty: One Year Limited Warranty
 Material: Vitreous china

Shipping Weight: **CT705E–Bowl**
 48.5 lbs.

Shipping Dimensions: **CT705E–Bowl**
 28"L x 11-3/4"W¹ x 15-1/2"W²
 x 15-1/2"H


Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CAN/CSA B 45 requirements.

Listing / Approvals: IAPMO/c-UPC, CSA, City of Los Angeles, State of Massachusetts, and others.


Meets and exceeds ASME A112.19.2 standards for drainline carry distance with a 2% grade and 4" I.D. pipe.

Note: Refer to manufacturer's instructions and local codes for proper flush valve installation and requirements.

These dimensions and specifications are subject to change without notice.

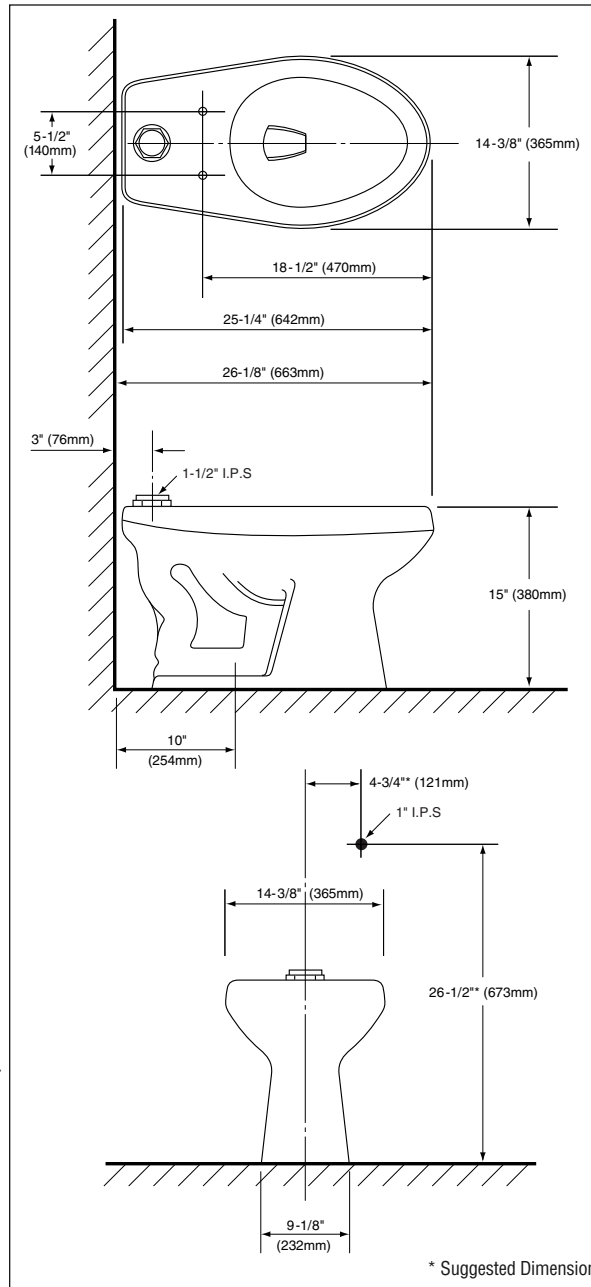

CT705E - Flushometer Toilet

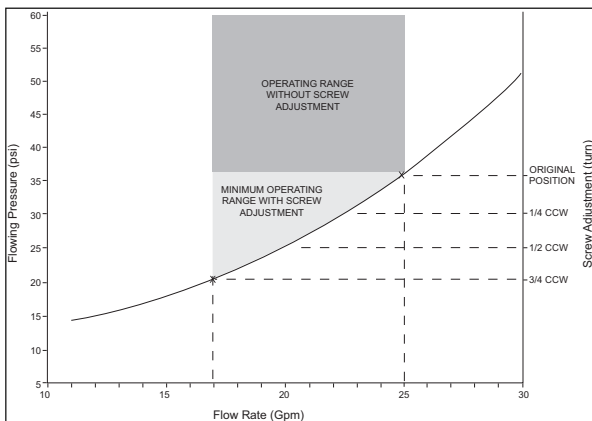

TOTO®

TOTO® U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
 Tel. (888) 295-8134 • Fax. (770) 282-8701 • www.totousa.com
 Printed in U.S.A. © TOTO® LTD. 09/07 #E50082

Printed on recycled paper

REV 11/08