



CAUTION

• Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

• Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver




Flat blade screwdriver




Pliers



Wire strippers

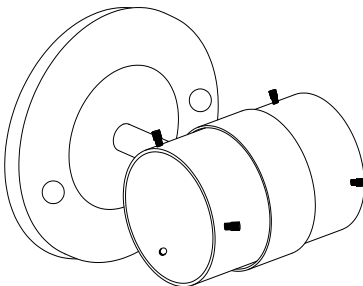


Fixture




Glass*2



Mounting Unit



Mounting Screws



Wire Nuts




Cap Nuts

***PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**

MODEL:2910 2911
VANITY LIGHT
Assembly Instructions

STEP 1


Use the **mounting screws** to attach the **mounting unit** to the junction box

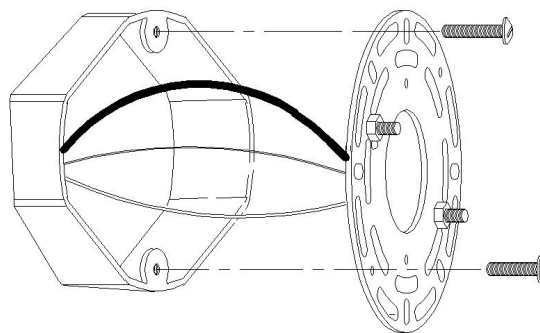

STEP 2

box to the **fixture mounting unit**

ground wires with the supplied **wire nuts** with electrical tape

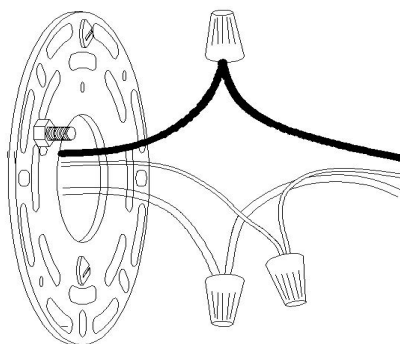


Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

(square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor



STEP 3

Place the fixture on the mounting unit and tighten with cap nuts.

secure the glass shades to the light fixture using the socket ring..

Install light bulbs TYPE T MAX 60W (not included).

