

WALL LANTERN

Assembly Instructions

MODEL #: 51300



CAUTION

• Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.


TOOLS REQUIRED



Ladder



Safety
glasses



Electrical
tape



Phillips
screwdriver




Flat blade
screwdriver




Pliers




Wire
strippers



Fixture



Mounting Unit



Mounting Screws




Wire Nuts

*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE

WALL LANTERN
Assembly Instructions
MODEL#: 51300


STEP 1

Unscrew the screw, then take out the hanging plate

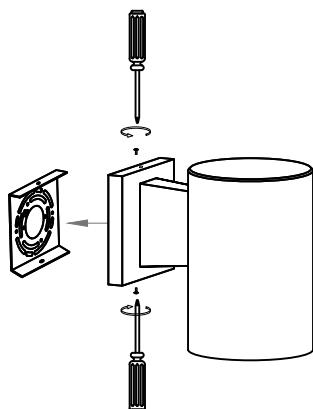

STEP 2

Use the mounting screws to attach the mounting unit to the junction box



STEP 3


Make the electrical connection from the junction box to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Connect Clear, Brown, Gold or Black "Parallel Wire with tracer (square & ridged) or White Fixture Wire to:


Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

White Supply Wire or Insulated Wire (other than green) with silver conductor



STEP 4

Fix the lamp body on the hanging plate and tighten the screws

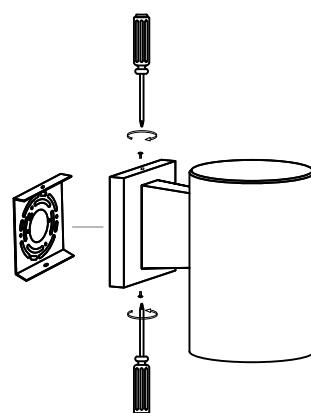

STEP 6

Install bulb(Not Included)

PAR30 TYPE

