

WALL LANTERN

Assembly Instructions

MODEL#: 4050



CAUTION

• Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

• Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.


TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape



Phillips
screwdriver




Flat blade
screwdriver




Pliers




Wire
strippers

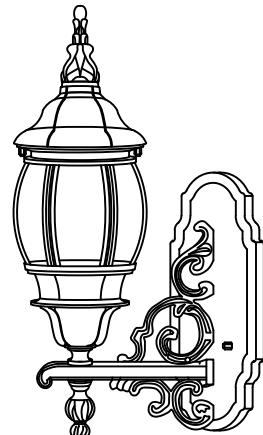

Fixture




Mounting Unit



Mounting Screws



Wire Nuts



Cap Nuts

*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE

WALL LANTERN

Assembly Instructions

MODEL#:4050

STEP 1

Unscrew the cap nuts,remove the metal plate from fixture



STEP 2


Install bulb(Not Included)and screw metal plate onto fixture

E26 TYPE A 60W




STEP 3

Use the mounting screws to attach the mounting unit to the junction box



STEP 4

Make the electrical connection from the junction box to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape

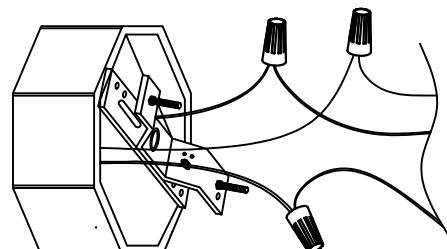


Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

White Supply Wire or Insulated Wire (other than green) with silver conductor

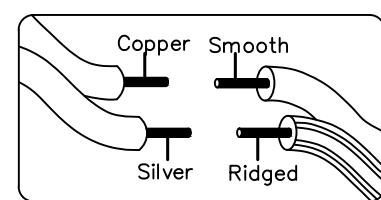

STEP 5

Place the canopy over the mounting unit and secure the fixture with the cap nuts.

