

# FLUSHMOUNT LANTERN

## Assembly Instructions

MODEL#: 40581



### CAUTION

•Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

•Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

#### TOOLS REQUIRED



Ladder




Safety glasses



Electrical tape



Phillips screwdriver




Flat blade screwdriver




Pliers




Wire strippers

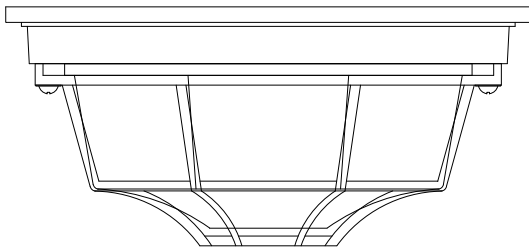


Fixture

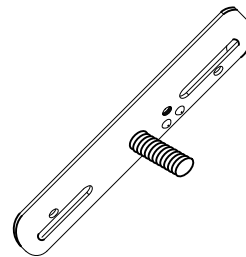

Mounting Unit



Mounting Screws



Wire Nuts



Finial

\*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


# FLUSHMOUNT LANTERN

## Assembly Instructions

MODEL#: 40581


### STEP 1

Unscrew the 2PCS screw,remove the metal Shade and acrylic cover from fixture



### STEP 2

Use the mounting screws to attach the mounting unit to the junction box



### STEP 2



Make the electrical connection from the junction box to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.


Connect Clear, Brown, Gold or Black \*Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor

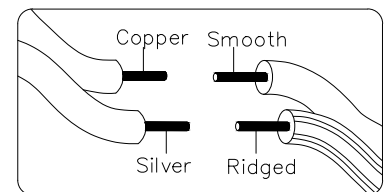

### STEP3

Screw the canopy to the mounting unit with the Ball nut

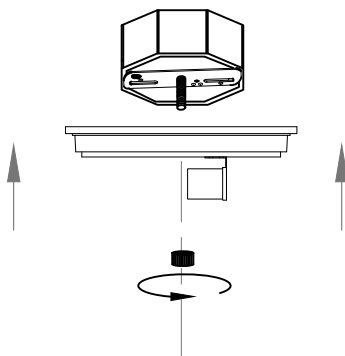

### STEP4

Install bulbs (not included), Put the glass and frame, tighten the screws

E26 Type A 60W\*1

