

PENDANT LIGHT (WIRE)

Assembly Instructions

MODEL#: 4160



CAUTION

•Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

•Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder




Safety
glasses



Electrical
tape



Phillips
screwdriver




Flat blade
screwdriver




Pliers



Wire
strippers

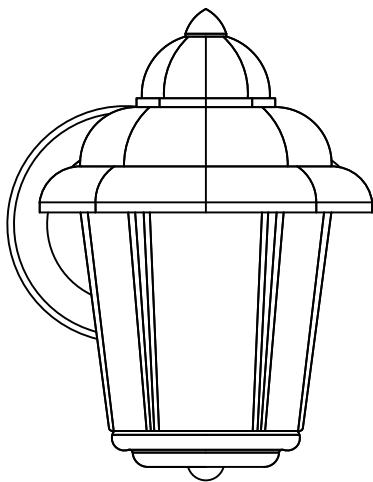

Fixture



Mounting Unit



Cap Nuts



Mounting Screws



Wire Nuts

*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


PENDANT LIGHT (WIRE)

Assembly Instructions

MODEL#:4160

STEP 1

Use the mounting screws to attach the mounting unit to the junction box



STEP 2



Make the electrical connection from the junction box to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.


Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor

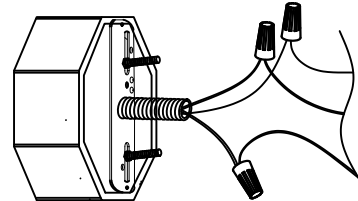


STEP 3

Unscrew the side nut and take out the glass




STEP 4

Install bulb(Not Included)
E26 60W*1



STEP 5

Tighten the side nuts and install the glass



STEP 6

Place the canopy over the mounting unit and secure the fixture with the cap nuts.

