

POST MOUNT

Assembly Instructions

MODEL#: 4186



CAUTION

• Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

• Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape



Phillips screwdriver




Flat blade screwdriver




Pliers



Wire strippers

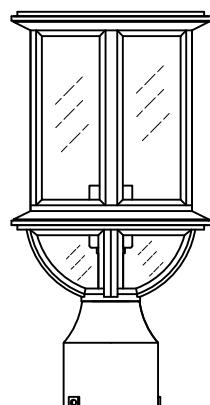


Fixture




Fixture top




Wire Nuts



Cap nuts



Plastic screw



Self-tapping screw

*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE

POST MOUNT

Assembly Instructions

MODEL#:4186

STEP 1

Install bulb (Not Included)
E26 Type A 60W



STEP 2

Install the fixture top onto fixture by cap nuts



STEP 3



Connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

White Supply Wire or Insulated Wire (other than green) with silver conductor

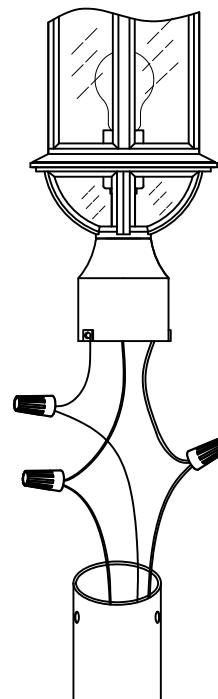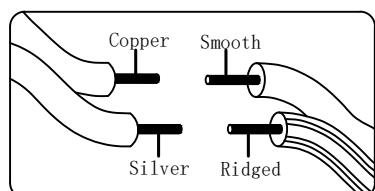

STEP 4

Install the fixture to the pole or base (Not included) and secure with the pre-assembled screws

