



CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED




Ladder




Safety glasses



Electrical tape




Phillips screwdriver




Flat blade screwdriver




Pliers



Wire strippers



Fixture




Metal shade



Socket ring



Mounting Unit



Mounting Screws



Wire Nuts



Cap Nuts




Plastic washer

* PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE

VANITY LIGHT ITEM # 51501 BK-WH,51502 BK-WH
Assembly Instructions

STEP 1

Use the mounting screws to attach the mounting unit to the junction box

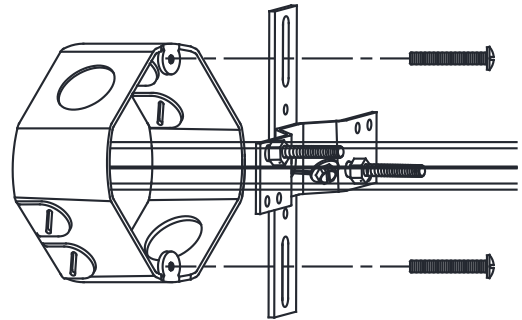

STEP 2


Make the electrical connection from the junction box to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape

Connect Clear,Brown,Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

Connect Clear,Brown,Gold or Black * Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor

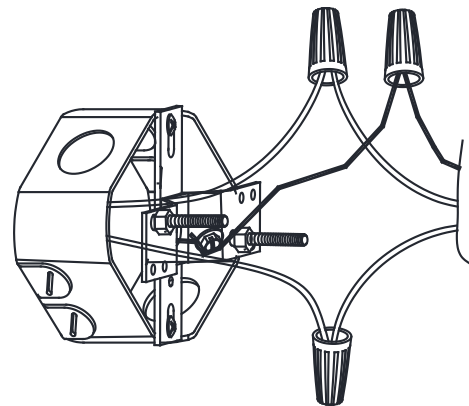

Silver Ridged

STEP 3

Please fix the metal shade and the lamp body with the socket ring, and fix the lamp body with plastic washer and cap nuts on the wall.
Install 60-Watt max type A lamp bulbs (not included)

