

SEMI-FLUSHMOUNT
Assembly Instructions

MODEL#: 16234 AG



CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning of the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape



Phillips screwdriver




Flat blade screwdriver




Pliers



Wire strippers



Fixture

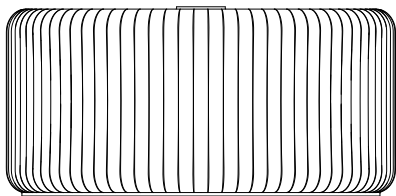

Glass shade



Canopy



ROD



Cover



Mounting Unit



Bolt Nut



Mounting Screws




Wire Nuts

***PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**


SEMI-FLUSHMOUNT
Assembly Instructions

MODEL#: 16234 AG


STEP 1
Place the fixture and glass shade over the mounting unit and secure the assembly with the rod.
Secure the rod onto canopy using the threaded pipe.

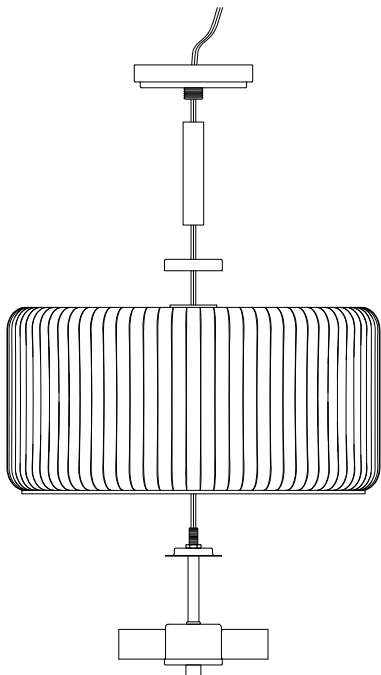

STEP 4
Place the canopy over the mounting unit and secure the fixture with the Bolt nuts.
Install bulb (not included). E12 Max Watt 60W

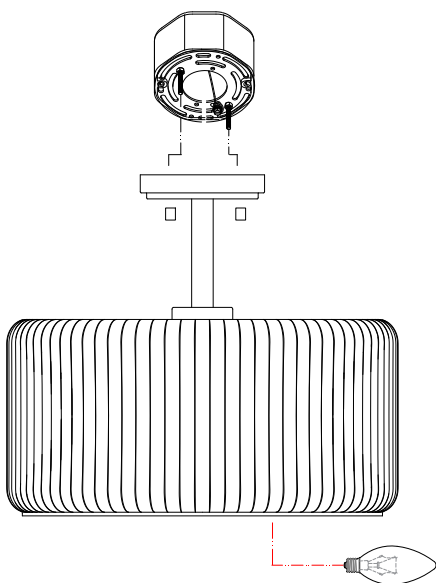

STEP 2
Use the mounting screws to attach the mounting unit to the junction box



STEP 3
Make the electrical connection from the junction box to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape.

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor

