

WALL LANTERN

Assembly Instructions



CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver




Flat blade screwdriver




Pliers




Wire strippers




Fixture




Mounting Unit



Outlet Box Screws



Wire Nuts



Mounting Screws


***PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**

WALL LANTERN

Assembly Instructions

STEP 1

Use the **outlet box screws** to attach the **mounting unit** to the outlet box

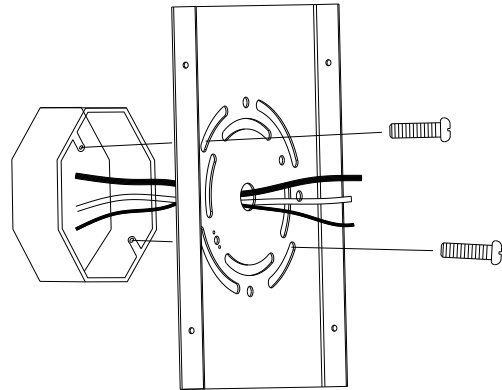

STEP 2



Make the electrical connection from the junction box to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.


Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor

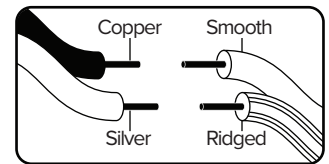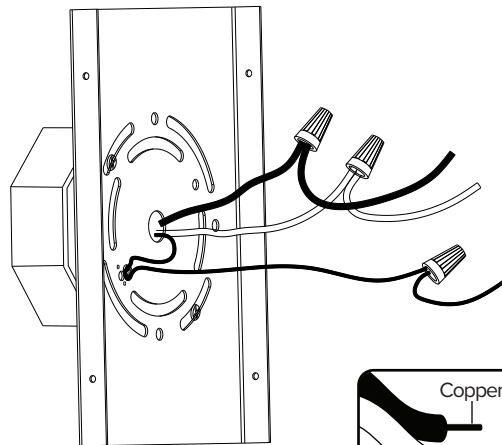

STEP 3

Secure the **fixture** to the **mounting unit** with the **mounting screws**. Install the bulbs (not included).

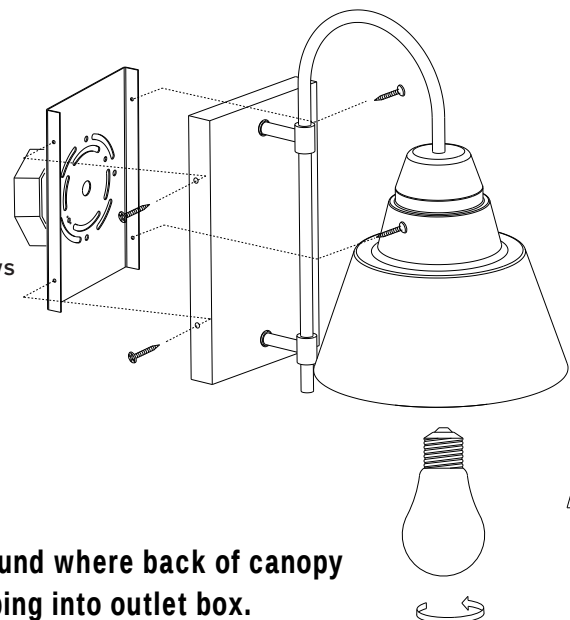

With silicone caulking compound, caulk completely around where back of canopy meets with the wall surface to prevent water from seeping into outlet box.