Chandelier installation
Assembly Instructions
Model No: 11618

CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED


Ladder



Safety glasses

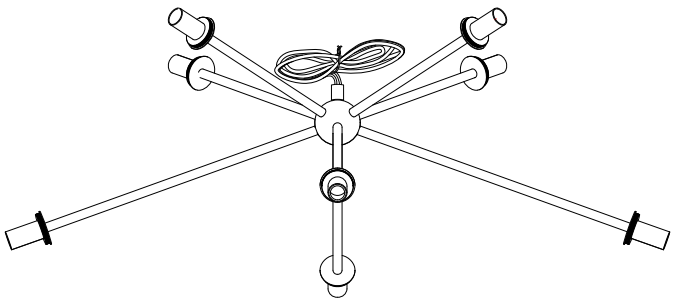

Electrical tape



Phillips screwdriver



Flat blade screwdriver

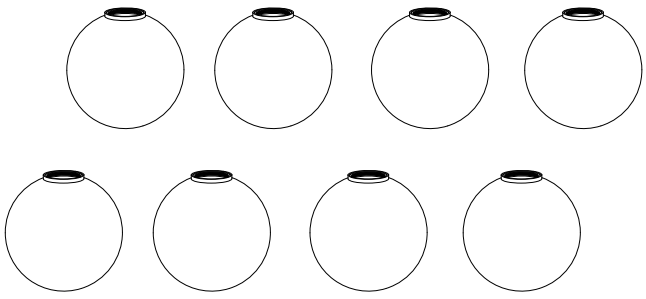

Pliers



Wire strippers



Fixture



canopy


rod


glass


Mounting Unit


screw

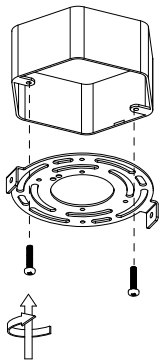

Mounting Screws


Wire Nuts

*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


Chandelier installation
Assembly Instructions
Model No: 11618


STEP 1
Use the mounting screws to attach the mounting unit to the junction box



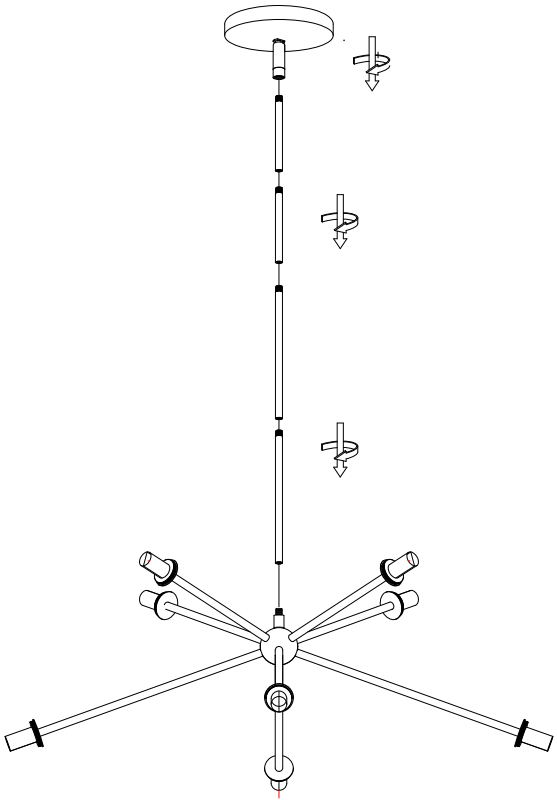
STEP 3
Make the electrical connection from the junction box to thefixture. Connect the
ground wire to the mounting unit using the preinstalled green ground screw.
Then, connect the positive, negative and ground wires with the supplied wire
nuts. Secure with electrical tape

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:	Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:
Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.	White Supply Wire or Insulated Wire (other than green) with silver conductor





STEP2
Tighten the metal rod and canopy to the fixture



STEP4
Align the canopy with the holes of the mounting unit and tighten it with the side screws
Install the E12 Type G bulb ×8 and glass

