



CAUTION

Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

Tools Required




Ladder




Safety glasses



Electrical tape




Phillips screwdriver




Flat blade screwdriver




Pliers




Wire strippers

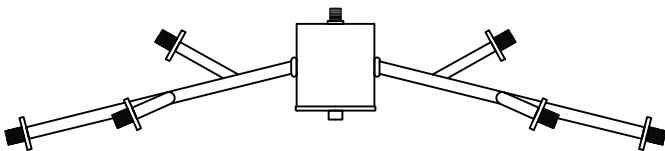


Body

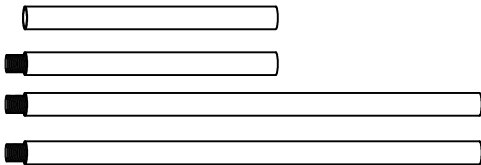


Metal tube (2*6"+2*12")




Canopy



Socket Ring




Shade




Cap Nuts




Mounting Unit



Mounting Screws



Wire Nuts




Socket ring driver

*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


STEP 1

Use the mounting screws to attach the mounting unit to the junction box

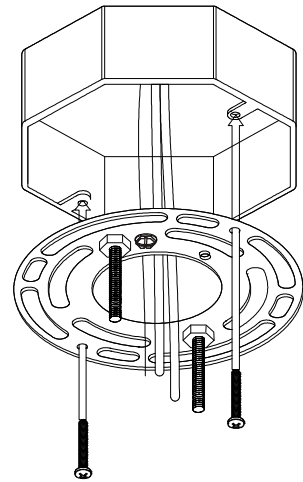

STEP 2

Make the electrical connection from the junction box to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape

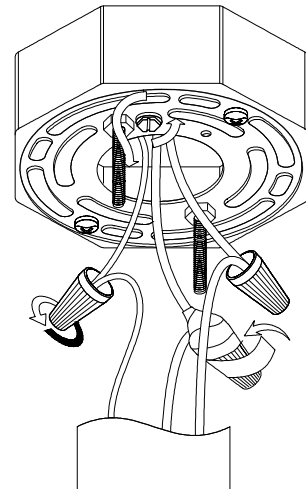


Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor

Connect Clear, Brown, Gold or Black Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor



STEP 3

Secure the Metal tube to the Body and tight them in sequence

STEP 4

Secure the Canopy to the Metal tube and tight it

STEP 5

Secure the fixture to the mounting unit by the cap nuts

STEP 6

Secure the Shade to the Socket by the Socket ring and Socket ring driver

Please use bulb not more than 25W or 7W LED (Do not include bulb)

