PENDANT LIGHT (ROD)

Assembly Instructions

MODEL:11834-16

CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.


TOOLS REQUIRED


Ladder


Safety glasses

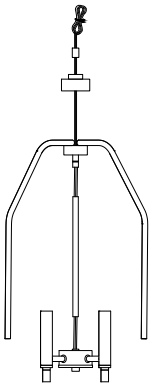

Electrical tape



Phillips screwdriver



Flat blade screwdriver



Pliers



Wire strippers


Fixture



Rods



Square frame



Mounting Unit


Cap Nuts


Cap Nuts


Mounting Screws

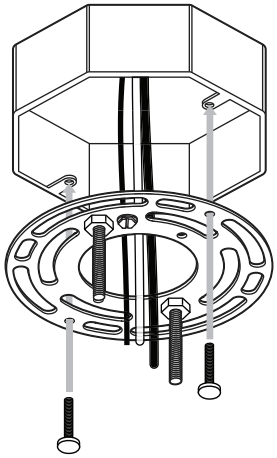

Wire Nuts


Canopy

***PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**


PENDANT LIGHT (ROD)
Assembly Instructions
MODEL:11834-16

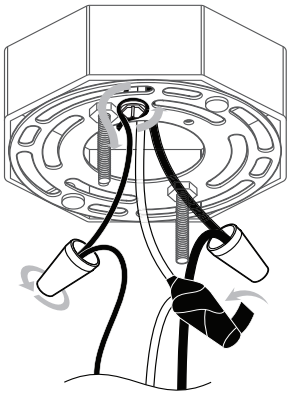
STEP 1
Use the **mounting screws** to attach the **mounting unit** to the junction box



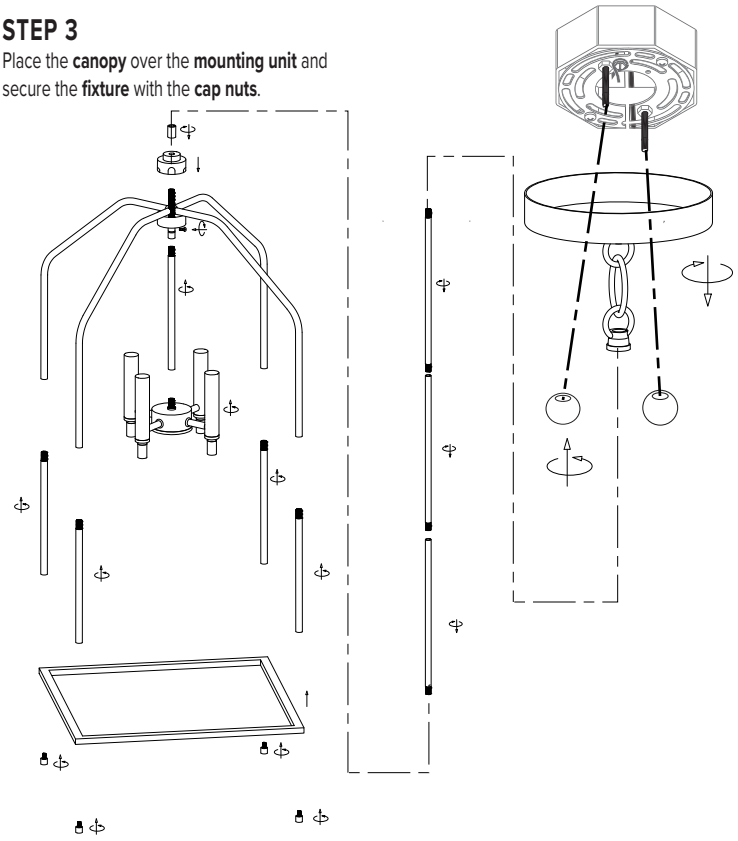
STEP 2
Make the electrical connection from the junction box to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:	Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:
Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.	White Supply Wire or Insulated Wire (other than green) with silver conductor





STEP 3
Place the **canopy** over the **mounting unit** and secure the **fixture** with the **cap nuts**.



STEP 4
Install bulb (not included).
Medium Base E12 Type B 60W*4

