

SEMI-FLUSHMOUNT
Assembly Instructions

MODEL#: 16242 AG

CAUTION



- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning of the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape



Phillips screwdriver




Flat blade screwdriver




Pliers



Wire strippers



Fixture



Glass shade



Cross Bar Unit



Set Screw



Mounting Screws




Wire Nuts

***PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**


SEMI-FLUSHMOUNT
Assembly Instructions

MODEL#: 16242 AG


STEP 1
Put the glass on the iron cover, be careful to put it smoothly,
be careful of the glass

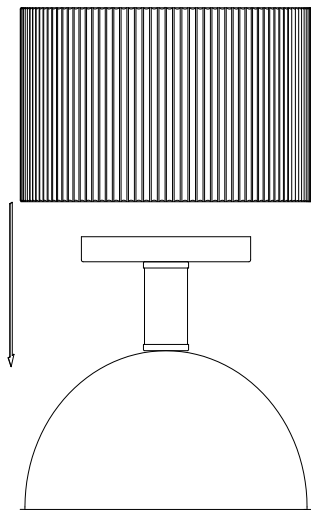

STEP 4
Attach the canopy of the fixture to the Cross Bar Unit by
aligning the holes of the canopy and the cross bar unit,
then secure them with the two set screws
Install bulb (not included). E12 Max Watt 60W

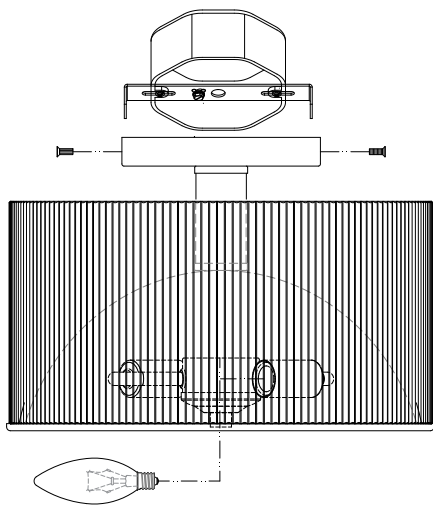

STEP 2
Use the mounting screws to attach the Cross Bar Unit to the
junction box



STEP 3
Make the electrical connection from the junction box to the
fixture. Connect the ground wire to the mounting unit using
the preinstalled green ground screw. Then, connect the positive,
negative and ground wires with the supplied wire nuts. Secure
with electrical tape.

Connect Clear, Brown, Gold or
Black Parallel Wire without tracer
(round & smooth) or Black Fixture
Wire to:

Black or Red Supply Wire or
Insulated Wire (other than green)
with copper conductor.

Connect Clear, Brown, Gold or
Black *Parallel Wire with tracer
(square & ridged) or White Fixture
Wire to:

White Supply Wire or Insulated
Wire (other than green) with silver
conductor

