

VANITY LIGHT
Assembly Instructions



CAUTION

- Inspect the wire insulation for any cuts abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape



Phillips screwdriver




Flat blade screwdriver




Pliers




Wire strippers

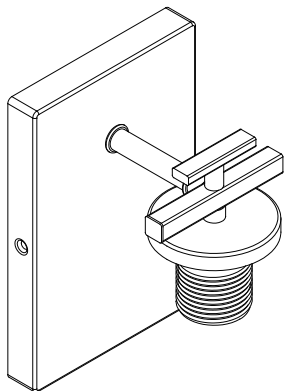


Fixture



frosted glass



clear glass




plastic gasket




Socket Ring




Cap Ring




socket tool



Mounting Unit



Mounting Screws



Wire Nuts



set screws


***PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**

VANITY LIGHT

Assembly Instructions


STEP 1

Use the **mounting screws** to attach the **mounting unit** to the junction box

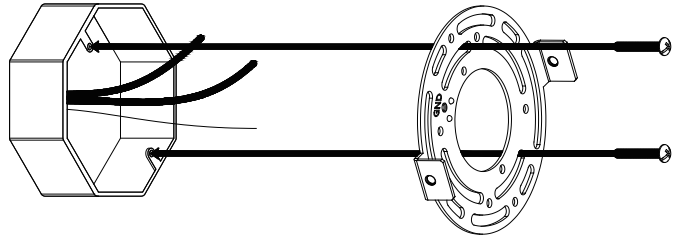

STEP 2

Make the electrical connection from the junction box to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape




Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor



STEP 3

Place the **fixture** over the mounting unit and secure with the **setscrews**.

Install the **clear glass, plastic gasket, frosted glass, cap ring**, secure with the **socket ring**, install one E26 60watt bulb(not included).

