VANITY LIGHT
Assembly Instructions

CAUTION

- Inspect the wire insulation for any cuts abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture o removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.


TOOLS REQUIRED


Ladder


Safety glasses

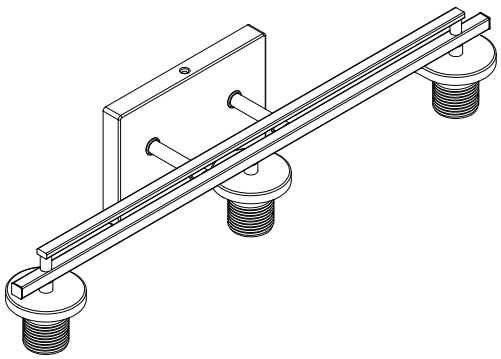

Electrical tape



Phillips screwdriver



Flat blade screwdriver



Pliers


Wire strippers



Fixture



frosted glass



clear glass



plastic gasket



Socket Ring


Cap Ring


socket tool


Mounting Unit


Mounting Screws

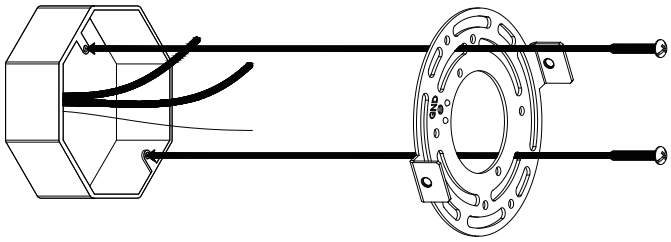

Wire Nuts


set screws

***PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**


STEP 1

Use the **mounting screws** to attach the **mounting unit** to the junction box



STEP 2

Make the electrical connection from the junction box to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape




Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor



STEP 3

Place the **fi**xture over the mounting unit and secure with the **setscrews**.
Install the **clear glass**, **plastic gasket**,**frosted glass**, **cap ring**, secure with the **socket ring**, install one E26 60watt bulb(not included).

