FLUSH MOUNT LANTERN
Assembly Instructions
Model No. 70520-3


CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.


TOOLS REQUIRED


Ladder



Safety glasses



Electrical tape



Phillips screwdriver


Flat blade screwdriver


Pliers


Wire strippers

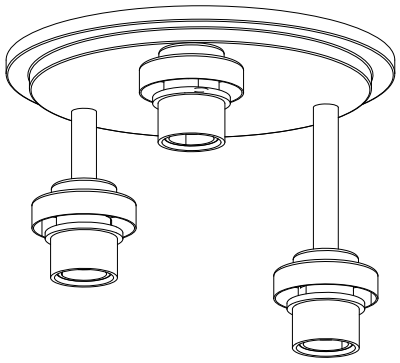

Fixture

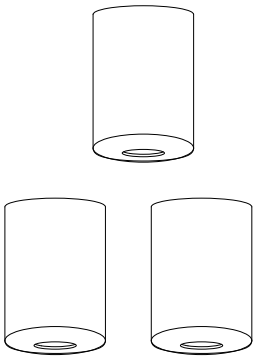
Glass


Lock nut


Mounting Screws



Wire Nuts


Mounting Unit

*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


FLUSH MOUNT LANTERN
Assembly Instructions
Model No. 70520-3


STEP 1
Use the mounting screws to attach the mounting unit to the junction box




STEP 2
Make the electrical connection from the junction box to thefixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:	Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:
Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.	White Supply Wire or Insulated Wire (other than green) with silver conductor







STEP 3
Use the mounting screws to attach the mounting unit to the junction box

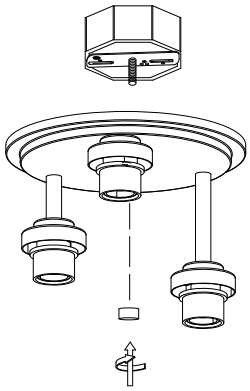

STEP4
Unscrew the lamp holder ring

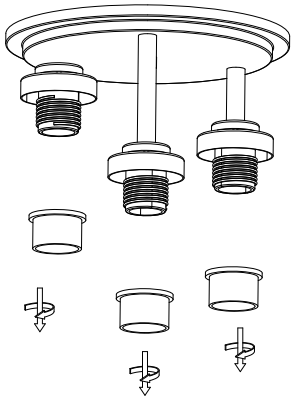

STEP5
Install glass

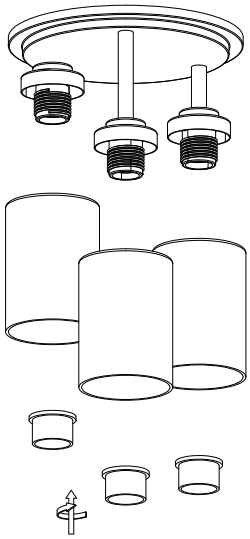

STEP6
Install bulb(Not Included)
E26 TYPE A 60W*3

