

72047-5

Assembly Instructions



CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape



Phillips screwdriver




Flat blade screwdriver




Pliers




Wire strippers

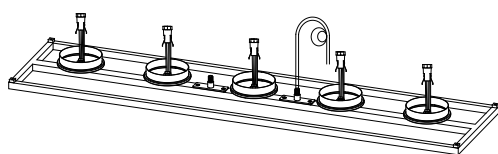


Fixture*1




Frame*1

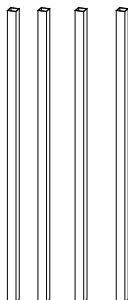


support rod*4




Glass shade*5



socket ring*5



Long & short rods*4



canopy*1




Mounting Unit*1



Wire Nut*3



Mounting Screw*2



set screws*8


***PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**

72047-5

Assembly Instructions

STEP 1

Use the mounting screws to attach the mounting unit to the junction box.



STEP 3




Make the electrical connection from the junction box to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape.

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor

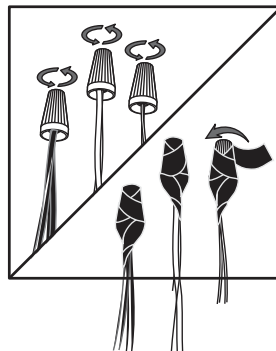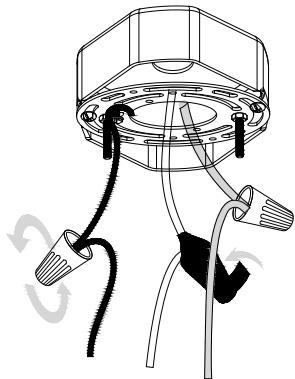

STEP 2

Secure the support rods and frame to the fixture with the set screws.

Screw the long rods to the top of the light fixture. Then screw the remaining short rods. Make sure to feed the branch wires through the rods during assembly.

Attach the canopy to the short rods opening the quick connector by loosening the nut. Ensure the quick connector is fully closed before moving on to the next step.

Secure the light fixture to the junction box by placing the canopy on the mounting unit and securing it with the cap nuts.

Secure the glass shades to the light fixture using the socket rings.

Install E12*5*60W Max bulb (not included).

