




TRANS GLOBE
L I G H T I N G

Job Name:	Job Type:
Fixture Location:	QTY:
Additional Notes:	

Emergency Bug Eye Light

EM-7002

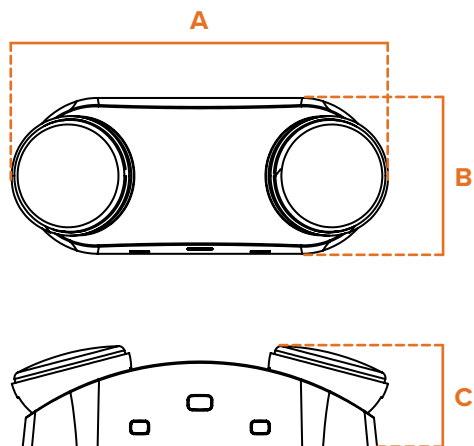

Wattage	2 x 1.2W Lamp Heads
Lens Type	Plastic
Bulb Type	LED Integrated
Color Temp	6500K
Lumens	180Lm
CRI	80
Available Finishes	White
Voltage	120-277V
Dimmable	N/A
Materials	ABS
Operating Temp	0° - 40°C / 32° - 104°F
Additional Info	LED indicator, Push button test switch 3.6V 700mAH Ni-cd battery More than 90mins on emergency mode
Warranty	Fixture: 1 year Limited Warranty Finish: 6 Months in normal climatic conditons LED Module: Rated for 5 years / 50,000 hrs

Dimensions

	A	B	C
EM-7002	9.82" W	4.13" H	2.69" D

Certifications



Shipping Box	Width	Height	Depth	Ship Wt	Method	Oversize	Case QTY
Ship QTY: 1ea.					Ground	No	
UPC: by finish				Finish:			

Additional Images



Standard Accessories




Screws & Anchors




Wire Nuts

1 fc Spacing

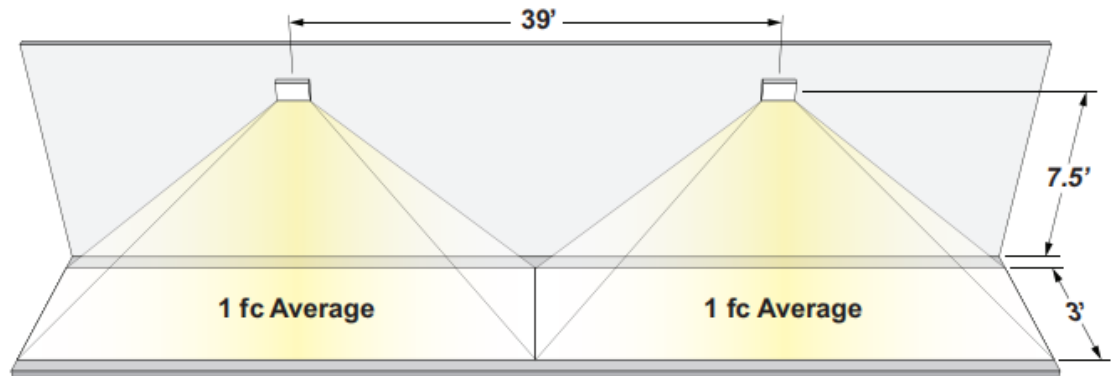

Photometrics

Luminous Intensity Distribution Curve

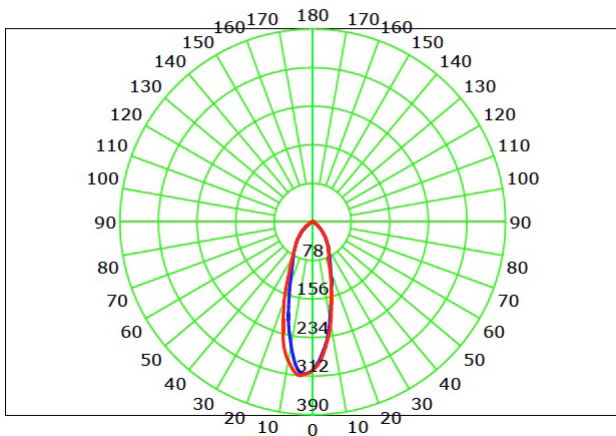

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	112	109	106	104	110	107	104	102	103	100	99	99	97	95	95	94	93	91
2	106	100	96	92	103	98	94	91	95	91	88	92	89	86	89	86	84	83
3	100	92	87	82	97	91	85	81	88	83	80	85	82	78	83	80	77	75
4	94	85	79	74	92	84	78	74	82	77	73	79	75	72	77	74	71	69
5	89	79	73	68	87	78	72	67	76	71	67	74	70	66	73	69	65	64
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	68	64	61	59
7	79	69	62	58	78	68	62	58	67	61	57	66	61	57	64	60	56	55
8	75	65	58	54	74	64	58	54	63	57	53	62	57	53	61	56	53	51
9	72	61	55	50	70	61	55	50	60	54	50	59	54	50	58	53	50	48
10	68	58	52	47	67	57	51	47	56	51	47	56	51	47	55	50	47	45

Spacing Criteria (0-180): 0.54
Spacing Criteria (90-270): 0.60
Spacing Criteria (Diagonal): 0.63