

POCKET LANTERN
Assembly Instructions
Model : 5045



CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver




Flat blade screwdriver




Pliers




Wire strippers



Fixture




Decorative Part

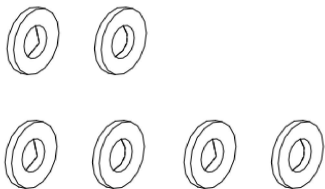


Rubber Washers




Mounting Unit



Mounting Screws



Wire Nuts

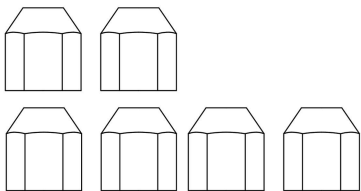

Cap Nuts

***PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**


POCKET LANTERN

Assembly Instructions

Model : 5045


STEP 1

Use the **mounting screws** to attach the **mounting unit** to the junction box



STEP 2

Make the electrical connection from the junction box to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape

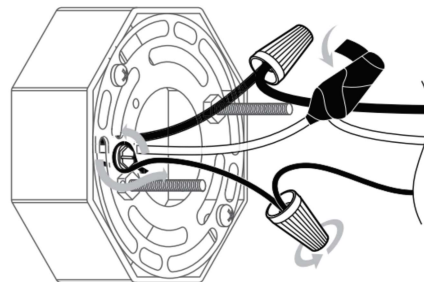


Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor



STEP 3

1. Twist out the cap nuts and take the bottom cover out .
2. Install bulbs **E12 60W MAX** (not included) .
3. Secure the top and bottom cover with the cap nuts .
4. Secure the Decorative Part to the bottom cover .
5. Secure the fixture to the mounting unit with the cap nuts .

