

POST MOUNT  
Assembly Instructions  
Model:5047



**CAUTION**

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

**TOOLS REQUIRED**



Ladder



Safety glasses



Electrical tape



Phillips screwdriver




Flat blade screwdriver




Pliers




Wire strippers

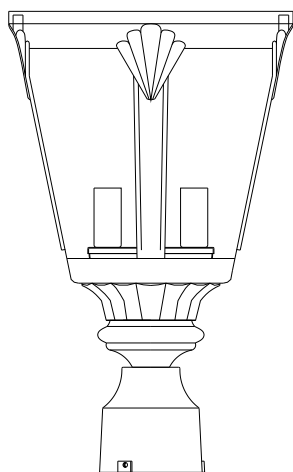

Fixture




Cap Nut Units

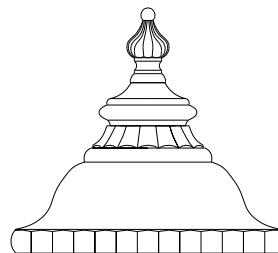

Fixture Top



Rubber Washers



Wire Nuts

\*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


# POST MOUNT

## Assembly Instructions

Model:5047

### STEP 1

Install a bulb E12 60W\*3 Max(not included) and secure the fixture top to the fixture.

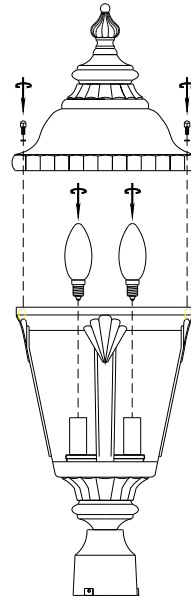

### STEP 2



Connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

Connect Clear, Brown, Gold or Black \*Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor

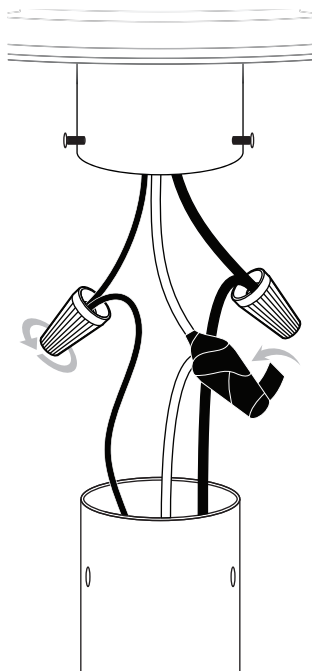

### STEP 3

Install the fixture to the pole or base (not included) and secure with the pre-assembled screws.

