

WALLLANTERN  
AssemblyInstructions  
MODEL#:5120



**CAUTION**

•Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

•Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

**TOOLS REQUIRED**



Ladder



Safety glasses



Electrical tape



Phillips screwdriver




Flat blade screwdriver




Pliers




Wire strippers



Fixture




Fixture top




Mounting Unit




Ball Nuts




Glass cover



Mounting Screws



Wire Nuts



Cap Nuts

\*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


# WALLLANTERN

## Assembly Instructions

MODEL#:5120


### STEP 1

1. Install bulb (Not Included) E12 Type B 40W \*2
2. Install the fixture top and Glass cover onto fixture by Ball nuts

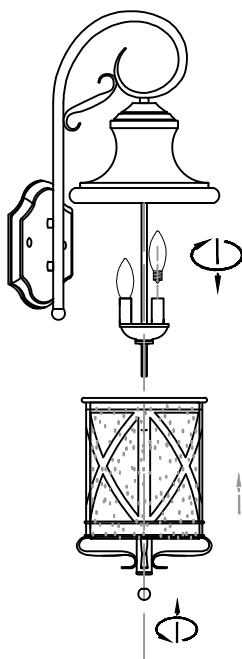


### STEP 2

Use the mounting screws to attach the mounting unit to the junction box




### STEP 3

Make the electrical connection from the junction box to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape

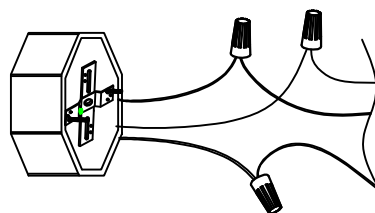

### STEP 4

Place the canopy over the mounting unit and secure the fixture with the cap nuts.

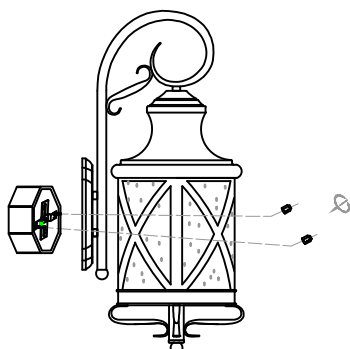

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Connect Clear, Brown, Gold or Black \*Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

White Supply Wire or Insulated Wire (other than green) with silver conductor

