



FLUSH MOUNT ITEM# 13719
Assembly Instructions



CAUTION
Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED

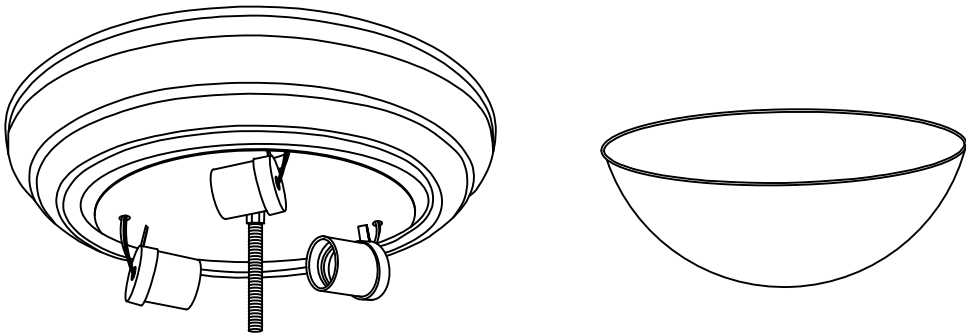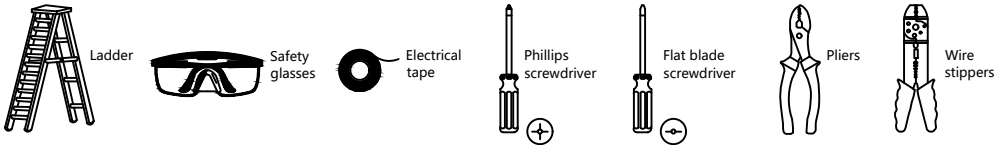

Fixture

Shade



Mounting Screws



Wire Nuts



Mounting Unit




Round board

*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE



FLUSH MOUNT ITEM# 13719
Assembly Instructions

STEP 1
Use the **mounting screws** to attach the **mounting unit** to the junction box



STEP 2
Make the electrical connection **from** the junction box to the fixture. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire** nuts. Secure with electrical tape

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:	Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:
Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.	White Supply Wire or Insulated Wire (other than green) with silver conductor

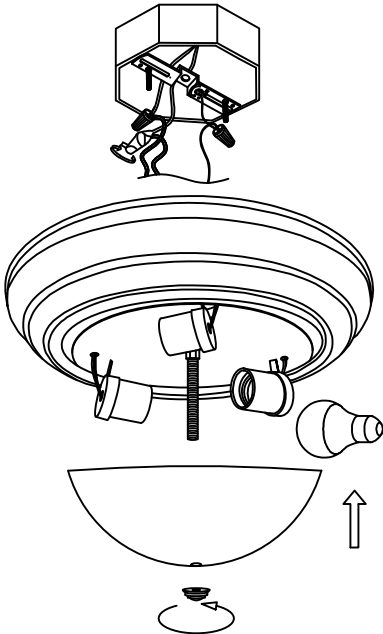

STEP 3
Install bulbs (not included). Place the fixture and shade over the mounting unit and secure the assembly with the finial.
Medium Base Type A 3"E26-60W