

# 15" OVERLAY READY DOOR UNDERCOUNTER REFRIGERATOR

## TUR-15-R/L-OP-C

TUR-15-R-OP-C (Right hinged)

TUR-15-L-OP-C (Left hinged)

### FEATURES

- Environmentally friendly, R600a hydrocarbon refrigerant that improves performance and efficiency while ensuring quiet operation.
- Industry exclusive, 300-series stainless steel interior.\*
- Zero-clearance hinging allows for integrated installation.
- Patented TruLumina® LED lighting gently illuminates your product and allows you to choose from 14 different color options.
- True Precision Control® with steel touch technology and readout provides digital accuracy.
- Balanced, forced-air refrigeration system enables rapid product pull down and even temperature throughout.
- TrueFlex® shelving system allows for adjustable organization options.
- NSF/ANSI Standard 7 compliant for packaged food product.
- Sabbath mode compliant.
- All undercounter models UL rated for outdoor use.
- Complies with NSF/ANSI Standard 7 for packaged food product.

### ORGANIZATION

- 2 adjustable/removable stainless steel encapsulated glass shelves.

### BUILD YOUR TRUE

Customize your True with a variety of finish and hardware options at [true-residential.com/custom](http://true-residential.com/custom).



TUR-15-R-OP-C


### SPECIFICATIONS

Dimensions (w x h x d) 14<sup>7</sup>/<sub>8</sub>" x 34<sup>1</sup>/<sub>4</sub>" x 23<sup>7</sup>/<sub>8</sub>"

Cutout Dimensions (w x h x d) 15" x 34<sup>1</sup>/<sub>2</sub>" x 24"

Standard Overlay Panel (w x h x d) 14<sup>5</sup>/<sub>8</sub>" x 30<sup>1</sup>/<sub>8</sub>" x 3<sup>3</sup>/<sub>4</sub>"

Panel provided by others. Other installation options available.  
Consult install guide for details.

Capacity (cu. ft.) 3.1  x 112

Temperature Range 33°F - 47°F

Weight (lbs.) 160

Voltage 115/60/1  115/60/1 NEMA-5-15R

Amps 1.9

Annual Energy Consumption (kwh) 258


Power Cord Length (ft.) 8

Energy Star Rated Yes

\*NOTE: Overlay models have black powder coated steel exteriors.

15" OVERLAY READY DOOR UNDERCOUNTER REFRIGERATOR

TUR-15-R/L-OP-C – (shown with a 3/4" cabinetry panel)

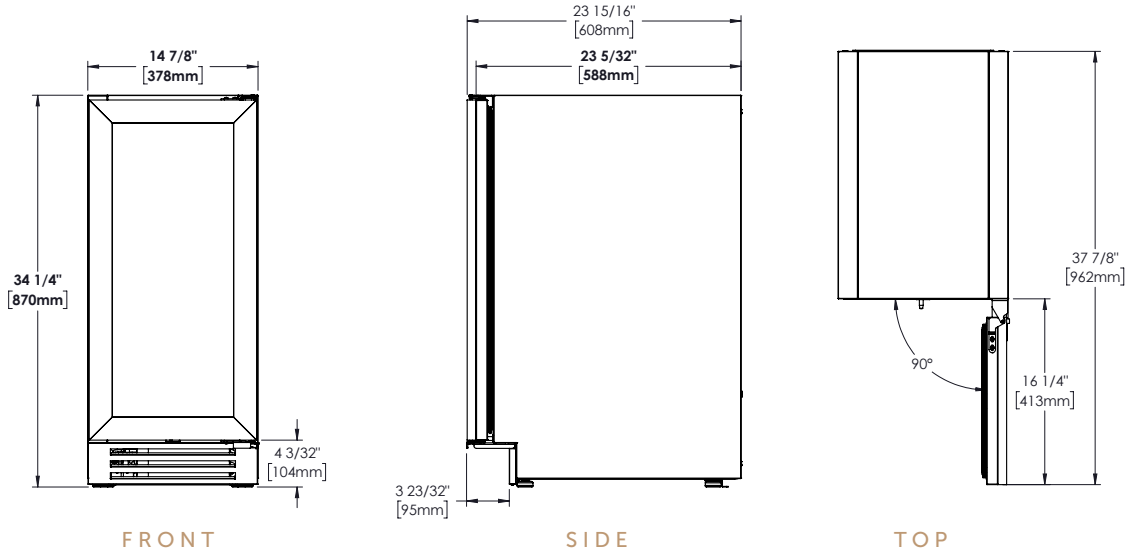

**OPENING DIMENSIONS**



**MODEL OPTIONS**

| MODEL         | FINISH                          |
|---------------|---------------------------------|
| TUR-15-R-OP-C | Overlay solid door right-hinged |
| TUR-15-L-OP-C | Overlay solid door left-hinged  |

**ACCESSORIES (OPTIONAL)**

- Anti-condensation pads
- Tempered glass, spill proof shelf

**WARRANTY**

- 3 year full (parts & labor)
- 6 year sealed system (parts & labor)
- 7–12 year (parts only – sealed system on registered products)