

## 24" OVERLAY READY GLASS DOOR WINE CABINET

### TWC-24-R/L-OG-C

TWC-24-R-OG-C (Right hinged)

TWC-24-L-OG-C (Left hinged)

#### FEATURES

- Environmentally friendly R600a refrigerant.
- Industry exclusive, 300-series stainless steel interior.\*
- Zero-clearance hinging allows for integrated installation.
- Patented TruLumina® LED lighting gently illuminates your product and allows you to choose from 14 different color options with the push of a button.
- Low-E, double pane, UV tinted glass.
- True Precision Control® with steel touch technology and readout provides digital accuracy.
- Temperature Range can be adjusted from 40°F (4.4°C) to 65°F (18.3°C).
- Sabbath mode compliant.
- All undercounter models UL rated for outdoor use.

#### ORGANIZATION

- 5 glide-out wine racks – 40 bottles.
- 1 floor wine cradle – 5 bottles.

#### BUILD YOUR TRUE

Customize your True with a variety of finish and hardware options at [true-residential.com/custom](http://true-residential.com/custom).



TWC-24-R-OG-C

#### SPECIFICATIONS

Dimensions (w x h x d) 23<sup>7</sup>/<sub>8</sub>" x 34<sup>1</sup>/<sub>4</sub>" x 23<sup>7</sup>/<sub>8</sub>"

Cutout Dimensions (w x h x d) 24" x 34<sup>1</sup>/<sub>2</sub>" x 24"

Standard Overlay Panel (w x h x d) 23<sup>5</sup>/<sub>8</sub>" x 30<sup>1</sup>/<sub>8</sub>" x <sup>3</sup>/<sub>4</sub>"

Panel provided by others. Other installation options available. Consult install guide for details.

Capacity (cu. ft.) 5.5



Temperature Range 40°F - 65°F

Weight (lbs.) 230

Voltage 115/60/1



Amps 1.9

Annual Energy Consumption (kwh) 260


Power Cord Length (ft.) 8

Energy Star Rated —

\*NOTE: Overlay models have black powder coated steel exteriors.

## 24" OVERLAY READY GLASS DOOR WINE CABINET

TWC-24-R/L-OG-C – (shown with a 3/4" cabinetry panel)

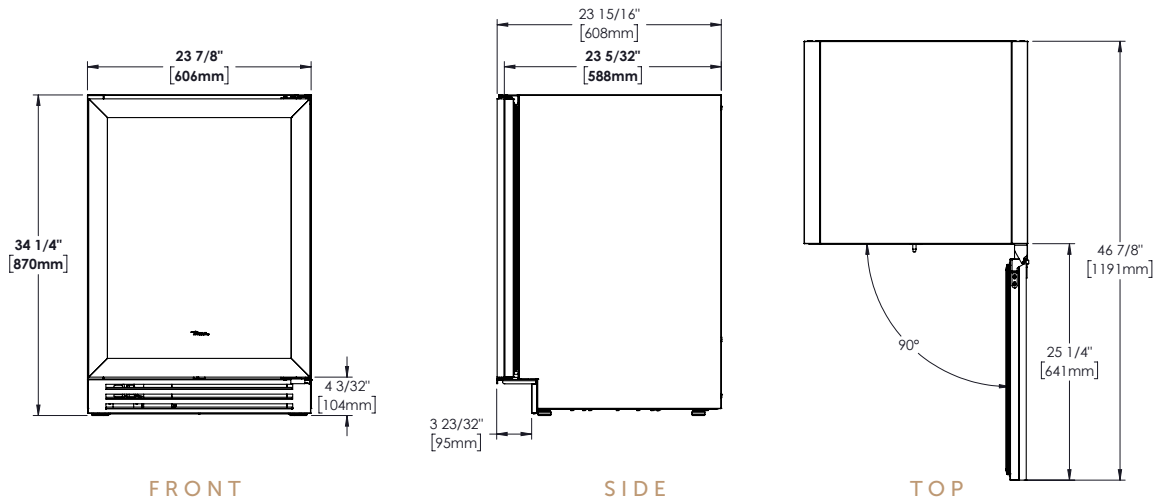

### OPENING DIMENSIONS



### MODEL OPTIONS

MODEL	FINISH
TWC-24-R-OG-C	Overlay glass door right-hinged
TWC-24-L-OG-C	Overlay glass door left-hinged

### ACCESSORIES (OPTIONAL)

- Anti-condensation pads
- Glide-out wine shelf

### WARRANTY

- 3 year full (parts & labor)
- 6 year sealed system (parts & labor)
- 7–12 year (parts only – sealed system on registered products)