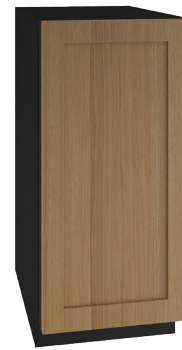Stainless Solid   Integrated Solid

Additional Options

- Accessory panels are designed for easy installation on Integrated models

Stainless Handleless
Panel

Key Features

- *Industry Exclusive:* **U-Choose™ feature offers five levels of ice density**

- *Industry Leading:* **Produces up to 90 lb of ice per day**

- *Industry Leading:* **Stores 30 lb of ice**

- Makes cylindrical compressed ice bits approx. ¾" L x ½" H

- Eco friendly - most efficient type of specialty ice

- Digital touch pad control with blue LED display

- Indicator alert notifies user when cleaning is needed

- Soft close door with articulating hinge

- Bright white LED lighting

- White interior

- Stainless steel handle (⁷⁄₈" diameter)

- Easiest nugget ice machine cleaning process in the industry

- Integrated model requires ¾" custom door panel and handle (not supplied by U-Line)

- Field reversible door is shipped right-hand hinged

- Built-in or freestanding

- Four adjustable leveling legs

- Factory installed drain pump model recommended if a gravity drain is not accessible

Model Details

Model	Voltage/Hz	Door Swing	Pump	Finish	Shipping Weight
UHNB115-SS01B	115 / 60	Field Reversible	-	Stainless Solid	101 lb
UHNP115-SS01B	115 / 60	Field Reversible	Pump Included	Stainless Solid	106 lb
UHNB115-IS01B	115 / 60	Field Reversible	-	Integrated Solid	96 lb
UHNP115-IS01B	115 / 60	Field Reversible	Pump Included	Integrated Solid	100 lb

Accessories

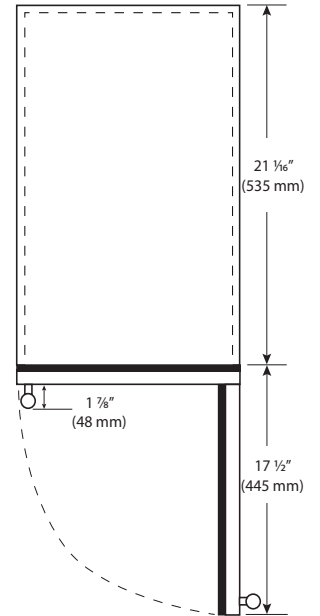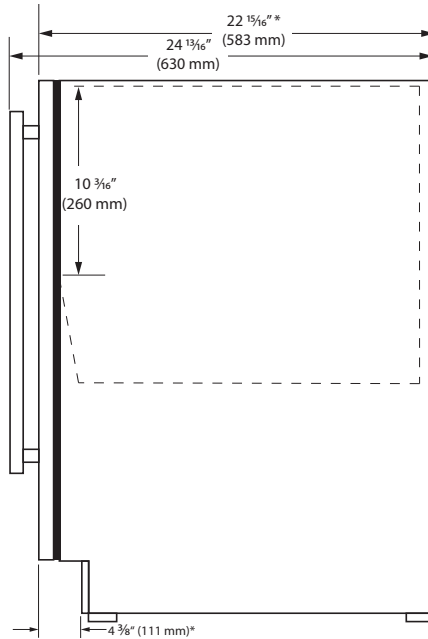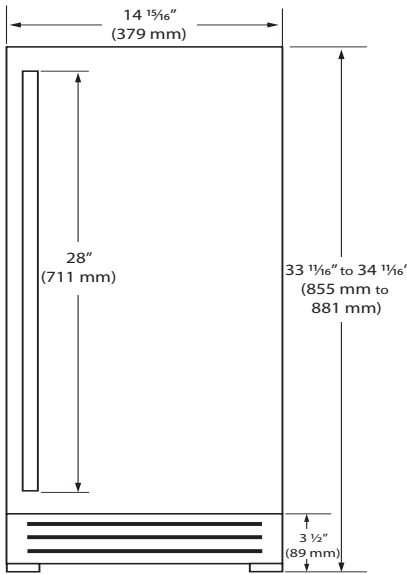| Model	Description	Finish	Shipping Weight
ULANUGGETCLEAN	Nugget Ice Cleaner (Single 8 oz. bottle)	N/A	1 lb
ULAWATERHOOKUP	Braided Water Supply Line Kit	N/A	2 lb
ULASHP15SOLID*	Stainless Handleless Panel Solid	Stainless	6 lb

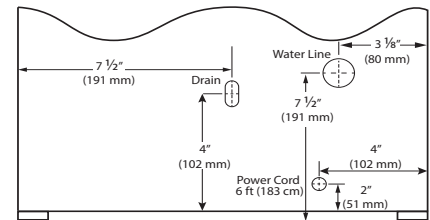*Installs on integrated models.

Front

14 ¹⁵⁄₁₆"
(379 mm)

28"
(711 mm)

33 ¹¹⁄₁₆" to 34 ¹¹⁄₁₆"
(855 mm to
881 mm)

3 ½"
(89 mm)

Side

*Add ¹⁄₂" for Integrated models with
³⁄₄" integrated panel installed.

22 ¹⁵⁄₁₆" *
(583 mm)

24 ¹³⁄₁₆"
(630 mm)

10 ³⁄₁₆"
(260 mm)

4 ⅜" (111 mm)*

Top

21 ¹⁄₁₆"
(535 mm)

1 ⅞"
(48 mm)

17 ½"
(445 mm)

Specifications

Model	HNB115
Amps: Running	3
Dimensions: Product Depth*	22 ¹⁵⁄₁₆" / 583 mm
Dimensions: Product Height	33 ¹¹⁄₁₆" / 855 mm
Dimensions: Product Width	14 ¹⁵⁄₁₆" / 379 mm
ENERGY STAR	Yes
Ice Production Per Day	90 lb
Ice Storage	30 lb
Panel Height	30" / 762mm
Panel Thickness	³⁄₄" 20mm
Panel Type	Solid Panel
Panel Width	14 ¹⁵⁄₁₆" / 379 mm
Product Weight: Max	106 lb
Refrigerant Type:	R600a
Sabbath (Star K Certified)	Yes

Back

7 ½"
(191 mm)

Drain

Water Line

3 ⅛"
(80 mm)

7 ½"
(191 mm)

4"
(102 mm)

4"
(102 mm)

Power Cord
6 ft (183 cm)

2"
(51 mm)

Cabinet Cut-Out

Preferred location
for electrical outlet
is in an adjacent
cabinet.

34 ¼"
(870 mm)
to
35 ¼"
(889 mm)

24"
(610 mm)

⅝"
(16 mm)

7"
(178 mm)

4" (102 mm)

15 ³⁄₁₆"
(386 mm)
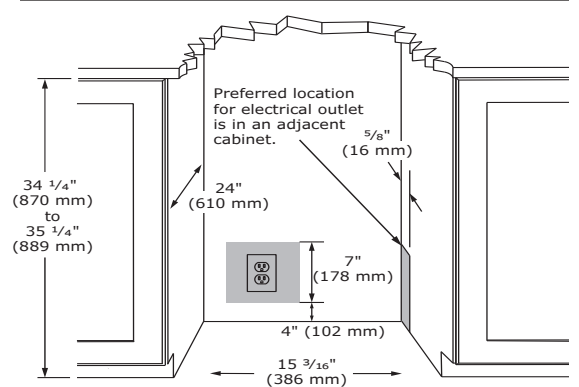
Warranty

- 1 Year (parts & labor) / 5 year sealed system (parts)

+ **Additional 1 Year (parts & labor) warranty at no cost with product registration**

See complete warranty for details

U-LINE
2 year warranty
available at no cost
(1 year + 1 with registration)

Installation Notes

- 15" cutout width sufficient if door protrudes beyond adjacent cabinetry
- No additional clearance is needed for ventilation
- Do not obstruct front grille air flow

Please visit u-line.com to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.

8900 North 55th Street • Milwaukee, Wisconsin 53223 USA • +1.414.354.0300 • sales@u-line.com • u-line.com