

UTTERMOST

ASSEMBLY INSTRUCTIONS




STYLE#: 22553

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

Carefully unpack all lamp parts from carton. We suggest a licensed electrician for all fixture installations.

1. Take the lamp carefully out of the Carton, and place on a flat surface.
2. Be sure power to the installation point is OFF.
3. Pull the power supply wire out from the outlet box and mount the **Universal Bar** to the outlet box with Outlet Box Screws.
4. Connect the wire as shown.
 - a. Connect the House Ground Wire to the Fixture Ground Wire, secure with wire nut.
 - b. Connect the House White (or Ribbed) Wire to the Fixture Supply Wire (White or Ribbed Side), secure with wire nut.
 - c. Connect the House Black (or Red) Wire to the Fixture Supply Wire (Black or Smooth Side), secure with wire nut.
 - d. Carefully stuff all of the connected wires into the Outlet Box.
5. Attach **Canopy** over **Universal Bar** and secure with **Screw**. Tighten until snug with screwdrivers.
6. Install correct **Bulbs** (Not Included) referring to fixture markings and/or labels for maximum wattage.
7. Place **Glass Shade** over the **Socket**, then push the thread through the Hole in the **Glass Shade** and hand tighten the **Nuts** into place.

Your installation is completed now. Restore electricity

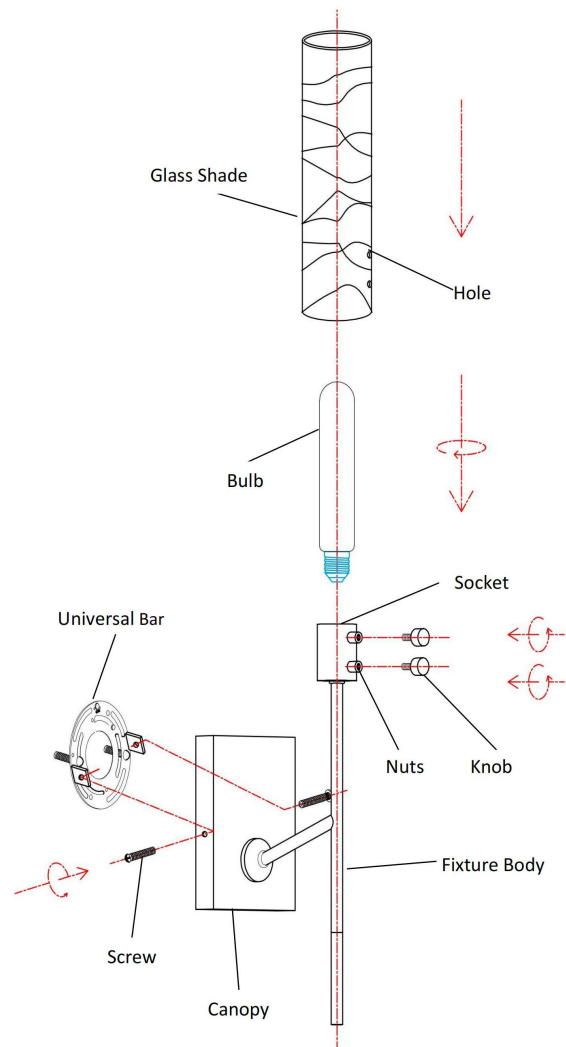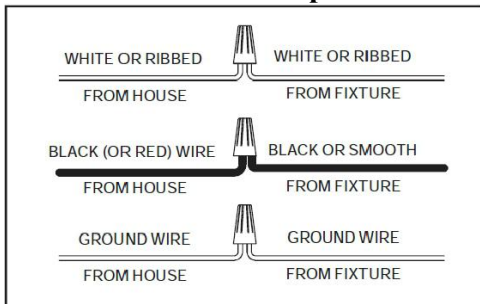

22553