

# ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0080 / C0195

## WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements. 2. READ AND SAVE THESE INSTRUCTIONS.

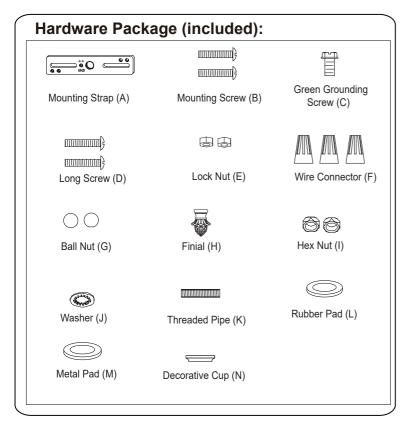

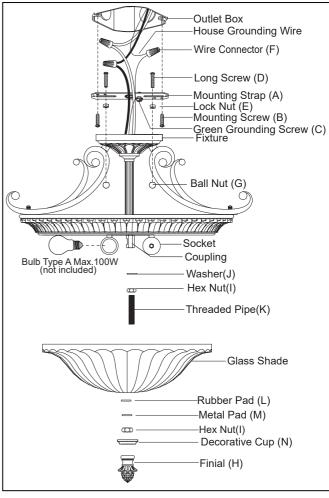

### Installation Steps

#### Turn off the power at fuse or circuit box.

- 1. Thread the long screws through mounting strap, then secure them with two lock nuts. Adjust the length of long screws if necessary.
- 2. Attach the mounting strap to the outlet box by using two mounting screws.
- 3. Pull out the source wires from the outlet box. Make wire connections using wire connectors as follows:
  - ---Connect the smooth-coated wire (marked) from the fixture to the black wire from the power source.
  - ---Connect the ribbed-coated wire (unmarked) from the fixture to the white wire from the power source.
  - ---Attach the fixture grounding wire to the mounting strap with the green grounding screw, then connect it to the house grounding wire with a wire connector.

Carefully put the wires back into the outlet box.

- 4. Attach the fixture to the mounting strap, and secure it with two ball nuts.
- 5. Attach threaded pipe to the coupling of the socket, and secure it with a washer and hex nut.

  NOTE:Depth of threaded pipe may need to be adjusted to properly fit glass shade, decorative cup and finial.
- 6. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
- 7. Attach the glass shade to the ceiling pan by inserting the threaded pipe, then secure it with a metal pad, rubber pad and hex nut.

8. Slip the decorative cup up through the threaded pipe, secure it with a finial.

### Turn on the power at fuse or circuit box.

The following parts are available for re-order if damaged or missing.

